

CBRE

LOCKOUT / TAGOUT

This LOTO selection includes the most commonly used items and the individual items that are included in the CBRE approved LOTO kits. If you have a different requirement or require a bespoke solution for your contract, including bespoke contract/client specific tags, please contact us and we can work with you on your requirement.

We also offer a whole range of different key solutions (keyed: alike, to differ, differ/master) and control box solutions. If you require any of these we will work with you to specify and obtain CBRE Technical approval.

For more information please email sales@morethansafety.co.uk



6030059

6030059
STEEL SHACKLE LOTO PADLOCK RED (38mm)
 Standard steel shackle padlock keyed to differ.

Comes with key retaining feature so when the shackle is open, the key cannot be removed from the padlock to reduce loss of misplaced keys.

Durable, non-conductive Nylon PA lock body. Can withstand temperature from -20°C to 150° and is resistant to UV rays.

Steel Shackle 26 x 38mm
 6mm Shackle Diameter
 Nylon PA body 38 x 45mm



6030060

6030060
NYLON SHACKLE LOTO PADLOCK RED (38mm)
 Standard nylon shackle padlock keyed to differ.

Comes with key retaining feature so when the shackle is open, the key cannot be removed from the padlock to reduce loss of misplaced keys.

Durable, non-conductive Nylon PA lock body. Can withstand temperature from -20°C to 150° and is resistant to UV rays.

Nylon Shackle 26 x 38mm
 6mm Shackle Diameter
 Nylon PA body 38 x 45mm



6030061

6030061
PA COATED STEEL HASP (25mm)
 Scissor action coated steel hasp.

Made from engineering plastic nylon PA injection moulding. Features a galvanised rustproof surface.

Hasp dimensions 40 x 115mm
 Lock hole diameter 10.5mm
 Lock shackle diameter 25mm



6030062

6030062
NYLON LOCKOUT HASP 43mm x 173mm
 Heavy duty flexible nylon lockout hasp.

Made using a high fire-resistant aluminium alloy coated in nylon. Can be applied to areas which require electric power isolation and lock has a high resistance to corrosion. Explosion proof. To open, push up and down. Accepts padlocks with a shackle diameter up to 9mm. Allows up to 6 padlocks. Nylon shackle diameter 6mm

6030067



6030067

**SIMPLE CIRCUIT BREAKER 45mm × 25mm × 10mm
Single pole miniature circuit breaker lockout.**

Manufactured from rugged reinforced PA. Can be locked out using a screwdriver or using a safety padlock. Can be used for most types of circuit breakers. Suitable for single pole miniature circuit breakers with handle width <7.7mm. Accommodates padlocks with shackle diameter up to 7mm.

6030068



6030068

**SIMPLE CIRCUIT BREAKER LOCKOUT
51mm × 25mm × 23mm
2-4 pole miniature circuit breaker lockout.**

Manufactured from rugged reinforced PA. Can be locked out using a screwdriver or using a safety padlock. Can be used for most types of circuit breakers. Suitable for 2 to 4 pole miniature circuit breakers <10mm. Accommodates padlocks with shackle diameter up to 7mm.

6030069



6030069

**SIMPLE CIRCUIT BREAKER LOCKOUT
(Mini and Middle Sized Circuit Breakers)**

Manufactured from rugged reinforced PA. Can be locked out using a screwdriver or using a safety padlock. Can be used for most types of circuit breakers. Suitable for mini and middle sized circuit breakers with handle width <5mm. Accommodates padlocks with shackle diameter up to 7mm.

6030070



6030070

**SIMPLE CIRCUIT BREAKER LOCKOUT
(Mini and Middle Sized Circuit Breakers Alt.)**

Mini and middle size circuit breaker lockout.
Manufactured from rugged reinforced PA. Can be locked out using a screwdriver or using a safety padlock. Can be used for most types of circuit breakers. Suitable for mini and middle sized circuit breakers with handle width <5mm. Accommodates padlocks with shackle diameter up to 7mm.

6030071



6030071

**SIMPLE CIRCUIT BREAKER LOCKOUT
125mm × 63mm × 40mm
Large size circuit breaker lockout**

Manufactured from rugged reinforced PA. Can be locked out using a screwdriver or using a safety padlock. Can be used for most types of circuit breakers. Suitable for large sized circuit breakers. Accommodates padlocks with shackle diameter up to 7mm.

6030075



6030075

CYLINDER TANK LOCKOUT

For neck rings up to 89mm in diameter

Prevents access to the main cylinder valve with no need to match your lockout device to varying diameter and threads of cylinder caps. Can be locked out by up to 3 padlocks simultaneously. The lock body front is suitable for writing on. Maximum diameter neck ring of 80mm. Padlock shackle diameter up to 7mm. Made from engineering plastic PP.

**6030065****6030065****MINIATURE CIRCUIT BREAKER LOCKOUT****Pin Out Standard****Nylon PA standard miniature circuit breaker pin out.**

Manufactured from strong nylon, this miniature circuit breaker lockout allows for individual breakers to be locked off. Fits most existing types of European and Asian circuit breakers. Easily installed using the aid of a push button or a rotate roller. Recommended to be used in combination with a safety padlock to secure the lockout in place. Use padlocks with shackle diameter up to 7mm. Pin out standard. Hole Spacing <12mm.

**6030066****6030066****MINIATURE CIRCUIT BREAKER LOCKOUT****Pin In Standard****Nylon PA standard miniature circuit breaker pin in.**

Manufactured from strong nylon, this miniature circuit breaker lockout allows for individual breakers to be locked off. Fits most existing types of European and Asian circuit breakers. Easily installed using the aid of a push button or a rotate roller. Recommended to be used in combination with a safety padlock to secure the lockout in place.

Use padlocks with shackle diameter up to 7mm
Pin in standard. Hole Spacing <12mm

**6030074****6030074****PNEUMATIC QUICK-DISCONNECT LOCKOUT****Fitted with 6.4mm 9.5mm & 12.7mm screwed joints****Isolate pneumatic energy without the expense of installing in-line lockout valves.**

Without the need to install a straight interlock valve, you can isolate pneumatic power, resulting in a lower cost and more convenient solution. The lockout is applied to the male fitting to isolate equipment from all compressed air sources. The hole in the centre of the device allows for pneumatic storage on an air hose and a loop on the side can be used to hang the hose and lockout device.

Fitted with 6.4mm, 9.5mm, and 12.7mm screwed joints

Can be equipped with padlocks where lock shackle length diameter is 6.4mm or 7.1mm

Made from impact resistant engineering plastic nylon PA

**6030073****6030073****CLAMP-ON BREAKER LOCKOUT****480 - 600V****Ideal for circuit breakers with no built in locking facility.**

The design clasps onto the switch providing secure locking protection with a new blade design to provide a tighter grip with less torque applied to the thumbscrew. Use the thumbscrew to clamp the lockout securely onto the switch tongue. Then pull the cover and lock into place to prevent the clamp from being loosened. Detachable cleats expand the range of applicable breakers.

Can lock a handle with width <72mm

Lockable range 22 x 68mm

Can be locked out using padlocks with shackle diameters up to 7mm.

Made from rugged Polypropylene (PP) and impact modified PA.

**6030076****6030076****SIMPLE CABLE LOCKOUT****Simple cable lockout for locking off multiple isolaters.**

A flexible and cost effective method for locking off multiple isolaters situated next to each other. Made from impact resistant engineering plastic nylon PA. The outer layer of cable is made from anti-UV PVC. Inner material has two choices available: Nylon and metal (stainless steel).

**6030072****6030072****LOCKOUT BAG 440mm×250mm**

This lockout bag is best used for locking out junction boxes and elevator controllers. Simply slide the device inside, tighten the top of the bag and lock out the cord to ensure the bag cannot be pulled off. Made from wear resisting polyester cloth and features a PVC liner to prevent others from making contact with any buttons through the bag. Can lock out many kinds of driving controller buttons or all kinds of special large sized plugs and accessories. Strap can be locked out by up to 6 padlocks or hasps



6030063

6030063
ADJUSTABLE BALL VALVE LOCKOUT 0.5" to 2.5"
 Polypropylene Adjustable Ball Valve Lockout.

These simple, easy to use lockouts clamp over the ball valve lever on the pipe, preventing the valve from operating. Use a padlock to lock the lockout in place on the valve. Made from polypropylene. Suitable for 13mm (1/2") to 64mm (2 1/2") pipes. Padlock shackle max diameter 9mm.



6030064

6030064
ADJUSTABLE BALL VALVE LOCKOUT 1.5" to 2.5"
 Heavy duty polypropylene adjustable ball valve lockout.

Manufactured from ultra-tough, high temperature resistant polypropylene. The two halves of the device encompass the ball valve lever to prevent inadvertent activation of the valve. Made from high temperature, high strength hot plastic Polypropylene (PP). Lock out double roll valves. With auxiliary rear gear parts, locked heightening extended ball valve. Suitable for 13mm to 70mm pipes. Max padlock shackle diameter 9mm.



6030077

6030077
GATE VALVE LOCKOUT 5" to 6.5"
 Gate Valve Cover Lockout

Gate valve covers and a simple, low cost but effective way to prevent unauthorised operation of valves. Once locked, the cover rotates freely around the valve handwheel without applying pressure, thus preventing operation. The different sized semicircle design allows for the two parts to be combined into one semicircle when storing and carrying for volume reduction. Padlock shackle diameter up to 7mm can be used. Valve rod diameter from 127mm (5") to 165mm (6.5").



6030078

6030078
GATE VALVE LOCKOUT 1" - 2.5"
 Gate Valve Cover Lockout

Gate valve covers and a simple, low cost but effective way to prevent unauthorised operation of valves. Once locked, the cover rotates freely around the valve handwheel without applying pressure, thus preventing operation. The different sized semicircle design allows for the two parts to be combined into one semicircle when storing and carrying for volume reduction. Padlock shackle diameter up to 7mm can be used. Valve rod diameter from 25mm (1") to 64mm (2.5").



6220033

6220033

CBRE APPROVED MOBILE LOTO BAG (ELECTRICAL)
Red with white tubing. Material: 600D polyester.

Branded CBRE Electrical Mobile LOTO Kit.

Retro styling. Adjustable shoulder strap. Front zip pocket.
Internal valuables pocket. Capacity 7 litres.



6220035

6220035

CBRE APPROVED MOBILE LOTO BAG (REFRIGERATION)
French Navy with White tubing. Material: 600D polyester.

Branded CBRE Refrigeration Mobile LOTO Kit.

Retro styling. Adjustable shoulder strap. Front zip pocket.
Internal valuables pocket. Capacity 7 litres.



6220034

6220034

CBRE APPROVED MOBILE LOTO BAG (COMBUSTION)
Black with white tubing. Material: 600D polyester.

Branded with CBRE and Gas Safe Combustion Mobile LOTO Kit.

Retro styling. Adjustable shoulder strap. Front zip pocket.
Internal valuables pocket. Capacity 7 litres.



6210167

6210167


CBRE BRANDED STATIC WALL MOUNTED LOCK OUT STATION YELLOW



5904403
FULLY INSULATED PLAIN SLOT SCREWDRIVER
3 x 100mm
 Manufactured and individually certified to EN 60900

Expert Quality, tested to 10kV, suitable for working on live circuits of 1kV AC and 1.5kV DC. Made with SVCM alloy steel blades which are hardened, tempered and chemically blacked. Fully insulated ergonomic soft grip handle with deep set blade sheath for total safety. Sold loose.

5904403

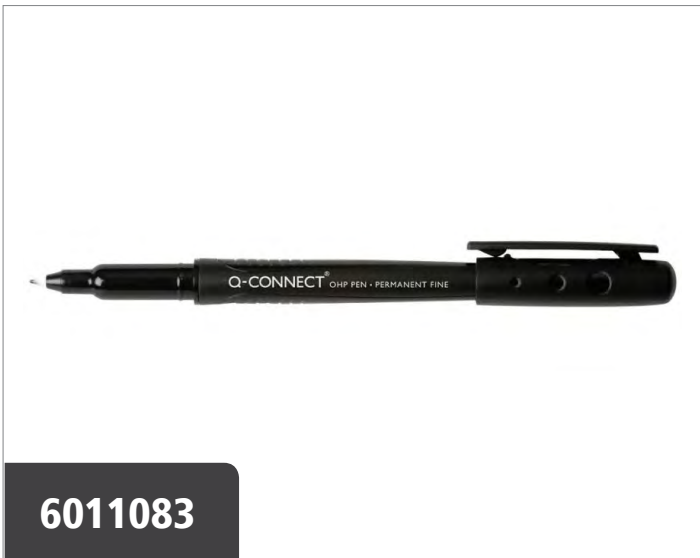

6011083
PERMANENT MARKER PEN

For writing on tags used in Lockout / Tagout situations.


6011083



9250168
CBRE GAS SAFE STICKER - Danger Do Not Use


Sticker. Printed CBRE and Gas Safety. Danger Do Not Use message.
 150mm x 141mm

9250168

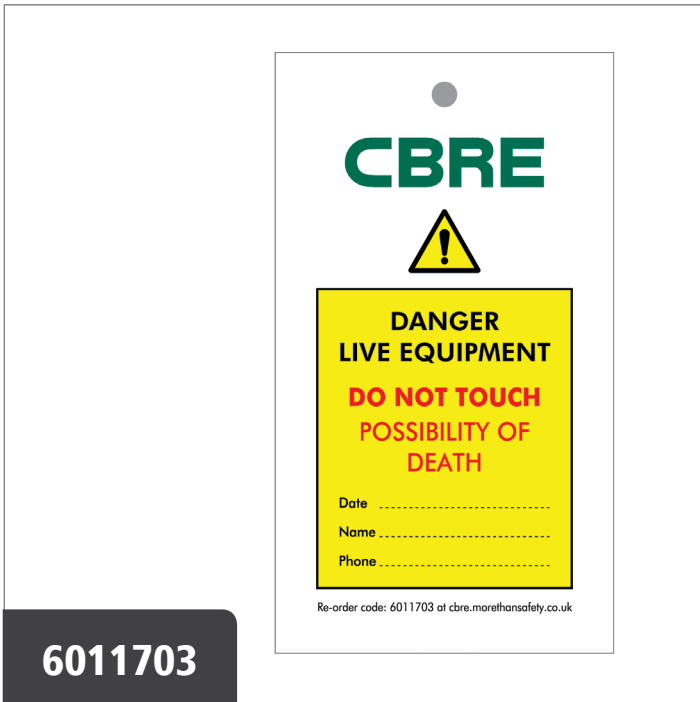

6011703
TAG SINGLE SIDED CBRE PRINTED LIVE EQPT. DO NOT TOUCH (PKT 10)

6011704
TAG-DOUBLE SIDED CBRE PRINTED INSPECTION / CAUTION (PACK OF 10)

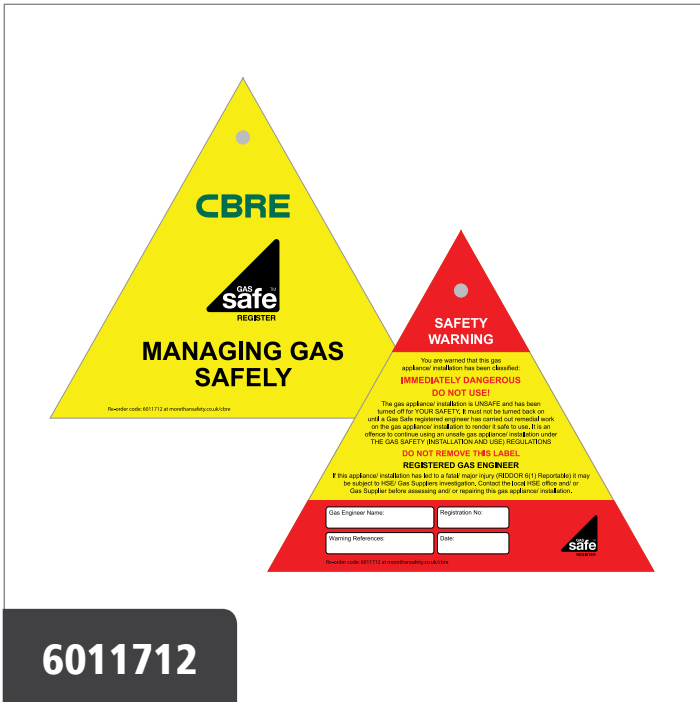

6011712
CBRE GAS SAFE DOUBLE SIDED TAG - IMMEDIATE DANGER (PACK OF 10)
 Tag - Double Sided. CBRE and Gas Safe Printed. Immediate Danger message supplied in a pack of 10. 160mm x 160mm x 160mm

6011713
CBRE GAS SAFE DOUBLE SIDED TAG - AT RISK (PACK OF 10)
 Tag - Double Sided. CBRE and Gas Safe printed. At Risk message supplied in a pack of 10. Size: 80mm x 145mm

