



**CBRE**

**ELECTRICAL WALKAROUND  
TOOLKIT 2019**

**5900506****Ball End Metric Hexagon Key Set (8 Piece)**

Manufactured from chrome vanadium steel that's hardened and tempered. The ball end tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Fitted in pocket-size plastic storage holder with non-slip grip. Display packed.

Contents: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 and 8.0mm.

**5903948****150mm Crescent-Type Adjustable Wrench with Phosphate Finish**

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with black phosphate finish, polished profile and jaws. Jaws offset at 22°. The 150, 200, 250 and 300mm sizes have a graduated scale on the fixed jaws. Suitable for use in areas where chemicals and chrome plate can give off poisonous fumes. Display packed.

Capacity: 24mm Length: 150mm

**5904925****Professional Utility Key**

Expert Quality, with two square, one triangle and one stepped key profile plus a double-ended 7mm plain/No.2 cross slot insert bit 40mm long. Holder included for 1/4" insert bit. Display packed.

**59010851****200mm Ergo Plus® Fully Insulated VDE Slimline Long Nose Pliers**

**Manufactured to DIN Standard and individually certified to EN 60900**

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic handle provides improved performance while each plier is individually tested to 10,000V for safe 1000V AC or 1500V DC live line working. Display packed.

Cut Hard Wire Dia. 1.8mm  
Cut Med / Hard Wire Dia. 2.8mm  
Length: 200mm

**59010848****180mm Ergo Plus® Fully Insulated VDE Combination Pliers**

**Manufactured to DIN Standard and individually certified to EN 60900**

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic handle provides improved performance while each plier is individually tested to 10,000V for safe 1000V AC or 1500V DC live line working. Display packed.

Cut Hard Wire Dia. 2.5mm  
Cut Med / Hard Wire Dia. 2.8mm  
Length: 180mm

**59010858****250mm Ergo Plus® Fully Insulated VDE Waterpump Pliers**

**Manufactured to DIN Standard and individually certified to EN 60900**

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic handle provides improved performance while each plier is individually tested to 10,000V for safe 1000V AC or 1500V DC live line working. Display packed.



**5904616**

**5904616**

**Tool Lanyard Single Carabiner**

Durable 1680D shock absorbing poly webbing. Aluminium alloy carabiner with captive eye. Treaded loop end that grips the tool when attached. Low-profile lightweight design reduces snag hazards.

Size: Standard 35" - 42" (89 -110cm)



**5906124**

**5906124**

**Wrist Tool Lanyard**

Polyester webbing cuff secures to wrist. Energy-absorbing ribbed pull cord. Adjustable barrel lock for tool attachment. Short length improves the drop clearance needed.

Wrist Measurement S/M 5" - 7" (13cm - 18cm).

Wrist Measurement L/XL 7" - 8½" (18cm - 22cm).

Sizes Available: SM - LXL



**5551217**

**5551217**

**Socket Tester**

Checks correct socket outlet wiring. Checks the quality of the earthing that is essential for safe installations. Checks for the polarity of the mains supply. Checks RCDs with measured current. Bright LEDs. Easy to use - anything other than green needs checking out.



**6202072**

**6202072**

**Walkaround Toolkit Toolholder**

CBRE Branded Large-Kit Up & Go Tool Holder



**5906215**

**5906215**

**SoftFinish® Electric Slim Fix Screwdriver Set**

The professional screwdriver for dry applications.

**Noticeable Ergonomics.** The foundation for the Wiha SoftFinish® screwdriver line was developed as part of a scientific study. As a professional tool with four handle sizes designed with its applications in mind, the unique design ideally combines the functions “quick turning: dynamic” and “maximum torque transmission: power”.

**SoftFinish® zone.** Soft, torque-supporting finish zone for dry applications. **Blade anchoring.** Reliable anti-twist connection between blade and handle. **VDE insulation.** Protective insulation spray-coated directly onto the blade, through-hardened blade. **Water bath.** Piece test according to IEC 60900 in a water bath at 10,000 V for verified safe use at 1000 V AC or 1500 V DC.



**5551284**

**5551284**

**1000A Ultra Slim Clamp Meter**

Ultra slim and lightweight 1000A clamp with 0.01A resolution

**Key Benefits**

Slim, lightweight high capacity clamp meter from the world leaders in clamps.

DMM functionality

G7 test leads

**Key Features**

10mm Jaw thickness

Tear drop jaw shape for easy access in to distribution boards

1000A Current measurement

0.01 A resolution

AC Voltage measurement up to 600V

1mV Resolution AC V

DC Voltage measurement up to 600V

0.1mV Resolution DCV

Resistance measurement

Continuity buzzer

Fuseless electronic protection on up continuity up to 600V

Comes with popular G7 test leads

Includes carry case with belt loop

Safety: IEC 61010-1 CAT.III 600V Pollution degree 2 (AC A), CAT.III 300V / CAT.II 600V Pollution degree 2 (AC/DC V)

IEC 61010-031, IEC 61010-2-032, IEC 61326 (EMC)

**Included:**

Test leads

Carry pouch with belt loop

Batteries

Manual



**6302278**

**6302278 CBRE Fire Door Gap Gauge Kit**



Item: Pouch

SKU: 6302000

Position: N/A



Item: Fire Door Gap Gauge

SKU: 6302277

Position: N/A



Item: Fire Door Check Cards

SKU: 6302001

Position: N/A



5551188

### 5551188 2 Pole LED Voltage Tester

**Key Benefits**

- Clear oversize luminous LEDs shine through voltage level
- Clear audible tone
- UK Specific GS38 Slender probe tips NO NEED to swap ends
- Bright torch light - gives ample illumination
- Fits into recessed terminals such as RCBOs without unscrewing any caps
- Phase Rotation - Bright green LEDs show left or right rotation.

**Indicates actual voltage if no batteries fitted**

Two pole testers that use batteries should indicate a live circuit if the batteries die or have not been inserted into the tester. This is normally indicated by a single LED but this does not indicate the actual voltage present. The KT1780 & KT1790 have a separate circuit so they operate with no batteries or dead batteries and still indicate the actual voltage present.

**Key Features**

- AC & DC Voltage tests up to 690V
- Clear Oversize luminous LED indication
- Soft to touch overmoulded rubber body
- Continuity Test
- Self diagnostic test
- Single Pole phase test
- Phase Rotation test
- Polarity indication
- Auto power on/off
- IP65 rating protects against Dust & Water ingress
- Designed to the new international safety standards IEC 61243-3 & IEC 61010-1
- Cat IV 600V

**Included:** Built in test leads, Batteries  
Instruction manual with Certificate of Conformity

**Weights & Dimensions:** Boxed Weight: 242g  
Boxed Dimensions: 300(H)mm x 40(H)mm x 70(D)mm



5551215

### 5551215 Proving Unit

50-690 V proving unit with just two terminals to test AC and DC voltage detectors. Fast response and works with low impedance voltage testers. Ramps down through voltage levels. LED indication of functioning unit.

**To ensure the safety of personnel working on electrical circuits BEST PRACTICE for the use of a proving unit before working on dead circuits.**

Output voltage: 180V in to 6.8 Ω , 720V - 820V in to 10M Ω  
Operating conditions: -10 to 40 C, 70% RH  
Dimensions: W65 x H120 x D45mm



**5551377**

**5551377**

**Kitbag 3 for 2 Pole LED Voltage Tester**

Carrying case for 2 Pole LED Voltage Tester. Branded zip kit bag with clear window. Case has 2 holes in proving unit storage section for testing without removal. Item CBRE branded.

Dimensions: Length 31cm Width: 13cm Depth: 9cm

Material - cloth with carrying strap



**5551233 & 5551617**

**5551233**

**Kewstick DUO (Non-Contact Voltage Detector)  
ITEM USED FOR INDICATION ONLY**

Unique dual sensitive non-contact voltage detector - just press and hold the desensitising button and you can differentiate between live and earthed cables approximately 10mm apart.

Key Benefits:

- Dual sensitivity
- Heartbeat - green LED indicates that the unit is on and working correctly
- Red LED indicates presence of voltage
- Audible tone also indicates the presence of voltage

Key Features:

- Clearly detects 90 - 600 volts AC without metal contact
- Two colour LEDs - Green for correct working and Red for Voltage detection
- Two tone buzzer, one for correct working and one for voltage detection
- Pocket-size for handy use anywhere
- Low power consumption circuits means long life batteries
- Cat IV rated
- 2 year unconditional guarantee (excluding batteries)

**5551617**

**Non Contact Proving Unit**

Portable proving unit for use on / off site that instantly proves the function of non-contact voltage testers before and after use.

Simple to use, just press the button and tests.


Belt clip for hands-free use.

Visual LED indication of function.

Robust and drop-proof from 1 metre.

Comes installed with a 9V battery.



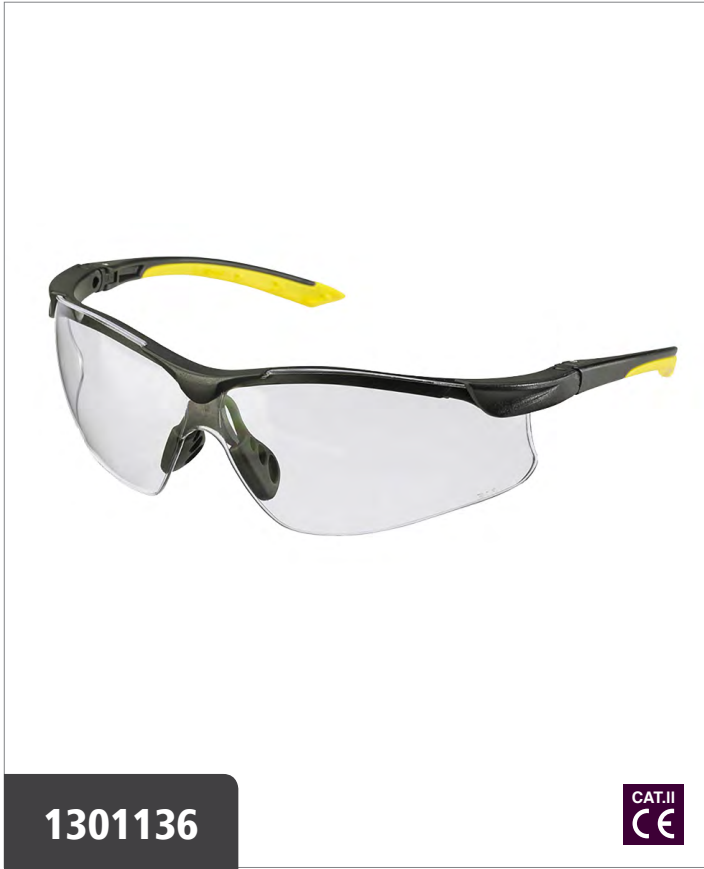

**1301136**

**Yale Spectacles Clear**

Ultra lightweight, wrap around design, contoured shape, polycarbonate lens (PC lens), soft nose bridge, non slip coloured rubber tips

Conform to EN166:

- Optical Class:1
- F - (Low impact energy)
- 2C-1.2 - UV Filter

Cat 2 - Intermediate Risk



**1751238**

**Arc Flash Glove 8.2 Cal**

18-gauge flame-resistant arc flash glove with neoprene palm. 1125 Grams of Cut protection. World's first 18g Arc Flash Glove. 18g Kevlar® composite filament fiber shell of protection. Arc-flash tested for level 2, rated ATPV = 8.2 cal/cm2. Flame-resistant neoprene palm coating for better grip. Touchscreen compatible.

Sizes: 5 - 11 Applications: Petro Chemical, Utilities, Oil and Gas