



CBRE
GAS TOOLKIT
2019

**5902373****5902373****Hi-Torq® Metric Combination Spanner Set (12 Piece)**
Generally in accordance with DIN3113 Specifications

Expert Quality, with Draper Expert HI-TORQ® deep offset pattern ring end. Open end set at 15°. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Supplied on wall mountable plastic rack. Display packed.

Contents: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19 and 22mm

**5902361****5902361****Imperial Combination Spanner Set (11 Piece)**
Generally in accordance with DIN3113 Specifications

Expert Quality, forged from chrome vanadium steel hardened, tempered and chrome plated for corrosion protection. Draper HI-TORQ® ring end offset at 15°. Jaw offset at 15°. Supplied in Tetron divided wallet with tie cord. Display packed.


Contents:

1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16 and 7/8" AF

**5905956****5905956****Draper Hi Torq® Metric Flexible Head Ratcheting Combination Spanner Set (7 Piece)**

Open end set at 15°. The Draper HI-TORQ® flexible head allows movement through 180°. Only 5° movement required to turn fastener, especially useful in confined spaces. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Display packed.

Contents: 8, 10, 12, 13, 14, 17 and 19mm

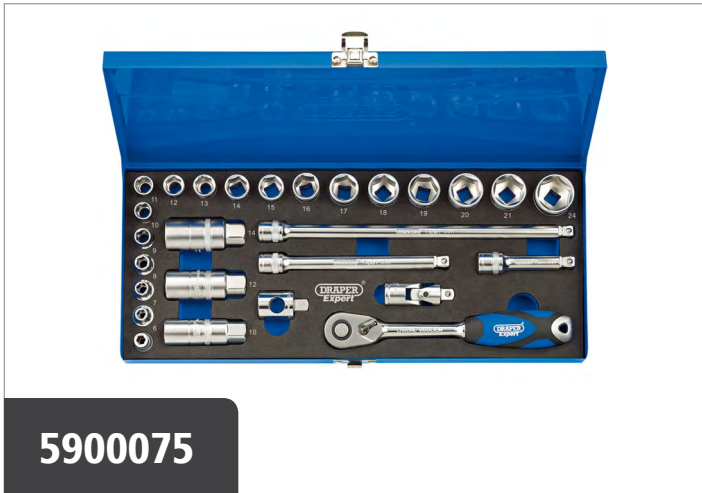

5900075


5900075
3/8" Sq. Dr. Metric Socket Set in Metal Case
(27 Piece)

Manufactured and tested generally in accordance with DIN3122 and ISO3315 Specifications

Six point sockets made from chrome vanadium steel that's hardened and tempered with a micro satin finish. Supplied with a 72 tooth reversible soft grip ratchet and accessories. Each socket has a knurled ring for extra grip. Packed in a steel carrying case with EVA foam inserts.

Contents:

- 17 sockets size 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 24mm
- 3 spark plug sockets size 10, 12, 14mm
- 72 tooth reversible ratchet with soft grip handle and quick release button
- 3 wobble extension bars size 75, 150, 250mm
- *'T' bar head 1/2" (F) x 3/8" (M) converter
- universal joint
- 3/8" sq dr x 1/4" hex adaptor. *'T' bar head/converter when used with extension bar forms a sliding 'T' bar.

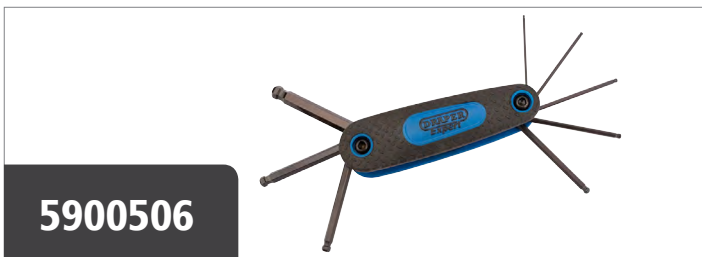

5900506

5900506
Ball End Metric Hexagon Key Set (8 Piece)

Manufactured from chrome vanadium steel that's hardened and tempered. The ball end tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Fitted in pocket-size plastic storage holder with non-slip grip. Display packed.

Contents: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 and 8.0mm.



Diameter	
5,5mm	50/85mm
6mm	60/100mm
7mm	60/100mm
8mm	80/120mm

5109223

5109223
CYL-9 Multi Construction Drill Bit Set
Robust Line, 4 Piece

Masonry & Concrete Drill Bits

CYL-9 MultiConstruction Drill Bit delivers stable drilling in all kinds of materials. Centring tip provides a steady drilling start and good guidance universally. Diameter-optimised AWB brazing and hardening technology increases robustness and reduces vibration during use. 4-flute dura design with a reinforced core section delivers better wear resistance and stability when drilling in soft concrete.

Total Length: 120mm
 Diameter: 8mm
 Working Length: 80mm



5902390

5902390
Imperial Hexagon and Ball End Hexagon Key Set
(12 Piece)

Hexagon keys with ball end on the long arm and conventional ends on short arm. The ball type hexagon tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Manufactured from chrome vanadium steel that's hardened and tempered then applied with a chemically blacked finish. Supplied in fold-out easy release holder which can be wall-mounted. Contents: 1/16, 5/64, 7/64, 9/64, 5/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16 and 3/8".



5900040

5900040

Heavy Duty Soft Grip Hacksaw (300mm)

Expert Quality, steel frame with aluminium handles. Frame has two sets of blade spigots which allows straight or 45° cutting. Supplied with a 300mm bi-metal blade.



6800139


6800139

10 x 300mm 24TPI B-Metal Hacksaw Blades

Conforms to BS 1919

Expert Quality, saw edge, manufactured from high speed steel strip, electron beam welded to high quality carbon steel backing. Display packed ten blades per card.

Pitch: 24

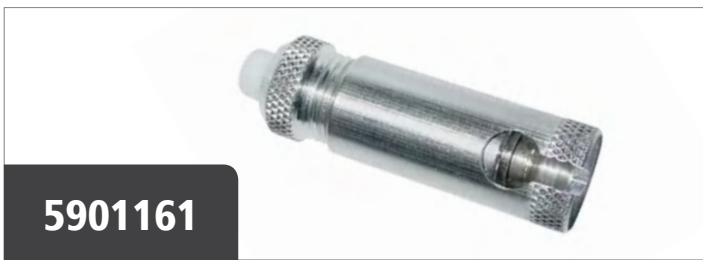


5901161

5901161

Thermocouple Tester

Used for testing the correct operation of thermocouples. The thermocouple to be tested is assembled into the unit and the tip heated whilst depressing the white button. If the thermocouple is functioning correctly the plunger will remain depressed for approx. 20/30 seconds, simulating the operation of a gas valve.

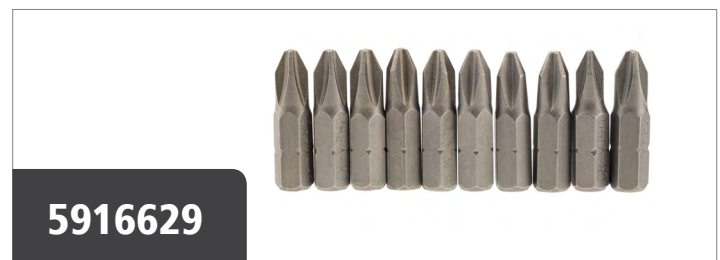

5916629


5916629

No. 2 1/4" Hex. Cross Slot Insert Bit 25mm Long x 10

Chrome vanadium steel hardened, tempered with a shot blasted finish. Supplied in 1, 2, 5 or 10's. Display packed.

Length: 25mm

Size: No.2

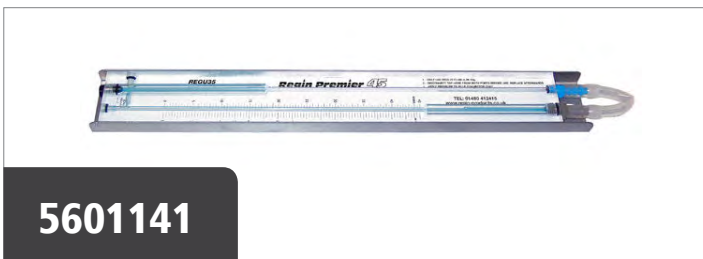

5601141

5601141

Premier 45 Manometer


A solid acrylic gauge in a tough metal casing. Measures to 18in.w.g. or 45 mbar. Easy zero adjustment and a clear accurate scale. Blue fluid for ease of reading in poorly lit locations. Trap chambers reduce the possibility of fluid loss through spillage or overpressure. Hanging slot and strap. Overall length - approx. 18" (450mm). Supplied in a nylon protective bag. Please note: use only 1.88 SG fluid (please contact MTS for details on this specific item). Spares available.



5120111

5120111

Numatic (Henry Type) 230V Vacuum Cleaner

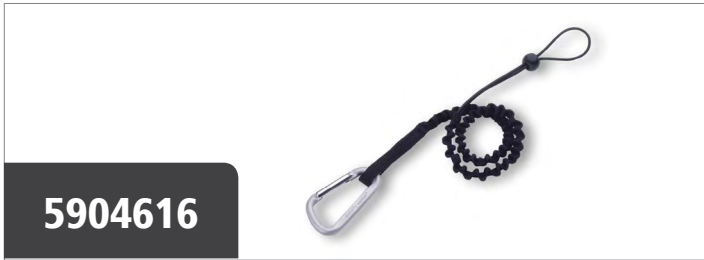

5904616

5904616

Tool Lanyard Single Carabiner

Durable 1680D shock absorbing poly webbing. Aluminium alloy carabiner with captive eye. Treaded loop end that grips the tool when attached. Low-profile lightweight design reduces snag hazards.

Size: Standard 35" - 42" (89 -110cm)



5906124

5906124

Wrist Tool Lanyard

Polyester webbing cuff secures to wrist. Energy-absorbing ribbed pull cord. Adjustable barrel lock for tool attachment. Short length improves the drop clearance needed. Sizes Available: SM - LXL
Wrist Measurement S/M 5" - 7" (13cm - 18cm).
Wrist Measurement L/XL 7" - 8½" (18cm - 22cm).



5210522

5210522

Aluminium Torch (2 x AA Batteries)

Aluminium case with on/off button. The LEDs produces clear beam of 20 lumen light. Fitted with a focusing beam function. Uses 2 x AA size batteries (sold separately). Display packed.




5210647

5210647

Cree and COB LED Head Lamp (3W) (3 x AAA Batteries)

Three function head lamp (100% white light / 50% white light / red light), fitted with a comfortable adjustable head strap with foam padding. Producing an ultra bright 220 lumen 80M beam of brilliant white light. The ON/OFF button is easily operated. Supplied with 3 x AAA batteries. Display packed.

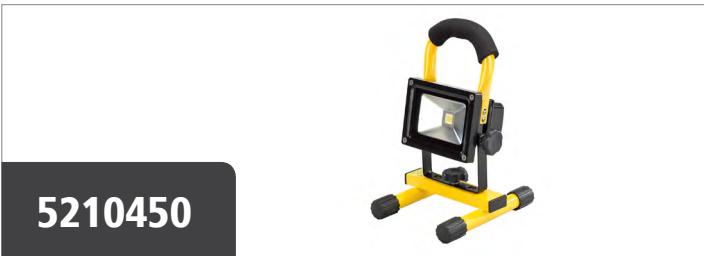

5210450

5210450

**10W COB LED Rechargeable Worklight (800 Lumen)
Manufactured to IP65 Specifications**

Expert Quality, produces a ultra-bright light output. The much improved battery life is due to the internal Li-ion battery and low energy COB LED consumption. The case is manufactured from IP65 rated aluminium. Due to COB LED technology the unit produces very little heat making it ideal for use in confined spaces.

Output: 800 Lumen Wattage: 10W



9206544

9206544

CBRE A-Frame Sign Kit with Interchangeable Signs

CBRE branded A-frame sign supplied with 10 interchangeable signs in a storage case.

Size of fold flat sign: 61cm x 29cm



5550111

5550111

13A RCD Adaptor (230V)

Tested to BS 1363 and IEC 61540

For use in domestic and industrial premises where RCD protection is required. Has reset and test facility. Can be plugged into standard 13A socket. Display packed.

Rated voltage: 230 - 250V/AC

Load: 3120W (max)

Maximum operating current: 13A

Rated trip current: 30mA

Trip speed: 30mS (typical)

Double pole RCD contact break.



6700152

6700152

230V Four Socket Extension Reel with Integral Carrying Handle (25m)

Complies with BS1363A and EN61242 Specifications

Robust, easy wind action with integral hand grip and four childproof socket outlets, gated for safety. Robust plastic case with easy wind handle. Fitted with thermal cut out switch. 1.25mm² cable, maximum load 13A*. Fitted with approved plug. Sold loose.

*Maximum load fully unwound. If the extension cable is used not fully unwound then the max. load is reduced to 5A.



6200250

6200250

Mobile Contractors 640mm Chest and 560mm Tool Box

Expert Quality, professional's tool chest and box in one unit on wheeled trolley with telescopic handle and kick plate. Each box is manufactured from tough durable plastic construction with steel locking latches. The chest has handles to facilitate lifting and rubber feet for protection. The tool box has a full size carrying handle and removable top organizer with 11 compartments. For safety when using the trolley, the tool chest and tool box can be locked together. Carton packed.

Configuration:

tool box (external): 560 x 280 x 250mm

tool box tote tray (internal): 515 x 225 x 50mm

tool box organiser (external): 390 x 170 x 33mm

chest (external): 640 x 400 x 445mm

chest tote tray (internal): 559 x 290 x 90mm



6202049 CBRE Technicians Toolbag

CBRE branded technicians toolbag. Bag can be fully opened with zip, multiple pockets for hand tools, laptop and documents, plenty of room for additional equipment, suitable for all common laptops, tool side bag, can be removed and used separately.

Dimensions: 47 x 35 x 22cm.



6200241 16 Pocket Tool Pouch

Expert Quality, nylon tool pouch, comprising 16 pouches of varying sizes, hammer loop, measuring tape clasp and chain. Supplied with 50mm wide adjustable webbing belt. Display carton.



6030080 CBRE Approved Combustion Mobile LOTO Kit



6302278

6302278 CBRE Fire Door Gap Gauge Kit



Item: Pouch

SKU: 6302000

Position: N/A



Item: Fire Door Gap Gauge

SKU: 6302277

Position: N/A



Item: Fire Door Check Cards

SKU: 6302001

Position: N/A



5906215

5906215

SoftFinish® Electric Slim Fix Screwdriver Set

The professional screwdriver for dry applications.

Noticeable Ergonomics. The foundation for the Wiha SoftFinish® screwdriver line was developed as part of a scientific study. As a professional tool with four handle sizes designed with its applications in mind, the unique design ideally combines the functions “quick turning: dynamic” and “maximum torque transmission: power”.

SoftFinish® zone. Soft, torque-supporting finish zone for dry applications. **Blade anchoring.** Reliable anti-twist connection between blade and handle. **VDE insulation.** Protective insulation spray-coated directly onto the blade, through-hardened blade. **Water bath.** Piece test according to IEC 60900 in a water bath at 10,000 V for verified safe use at 1000 V AC or 1500 V DC.



5551284

5551284

1000A Ultra Slim Clamp Meter

Ultra slim and lightweight 1000A clamp with 0.01A resolution

Key Benefits

Slim, lightweight high capacity clamp meter from the world leaders in clamps.

DMM functionality

G7 test leads

Key Features

10mm Jaw thickness

Tear drop jaw shape for easy access in to distribution boards

1000A Current measurement

0.01 A resolution

AC Voltage measurement up to 600V

1mV Resolution AC V

DC Voltage measurement up to 600V

0.1mV Resolution DCV

Resistance measurement

Continuity buzzer

Fuseless electronic protection on up continuity up to 600V

Comes with popular G7 test leads

Includes carry case with belt loop

Safety: IEC 61010-1 CAT.III 600V Pollution degree 2 (AC A), CAT.III 300V / CAT.II 600V Pollution degree 2 (AC/DC V)

IEC 61010-031, IEC 61010-2-032, IEC 61326 (EMC)

Included:

Test leads

Carry pouch with belt loop

Batteries

Manual



5551188

5551188
2 Pole LED Voltage Tester

Key Benefits

- Clear oversize luminous LEDs shine through voltage level
- Clear audible tone
- UK Specific GS38 Slender probe tips NO NEED to swap ends
- Bright torch light - gives ample illumination
- Fits into recessed terminals such as RCBOs without unscrewing any caps
- Phase Rotation - Bright green LEDs show left or right rotation.

Indicates actual voltage if no batteries fitted

- Two pole testers that use batteries should indicate a live circuit if the batteries die or have not been inserted into the tester.
- This is normally indicated by a single LED but this does not indicate the actual voltage present.
- The KT1780 & KT1790 have a separate circuit so they operate with no batteries or dead batteries and still indicate the actual voltage present.

Key Features

- AC & DC Voltage tests up to 690V
- Clear Oversize luminous LED indication
- Soft to touch overmoulded rubber body
- Continuity Test
- Self diagnostic test
- Single Pole phase test
- Phase Rotation test
- Polarity indication
- Auto power on/off
- IP65 rating protects against Dust & Water ingress
- Designed to the new international safety standards IEC 61243-3 & IEC 61010-1
- Cat IV 600V

Included: Built in test leads, Batteries
Instruction manual with Certificate of Conformity

Weights & Dimensions: Boxed Weight: 242g
Boxed Dimensions: 300(H)mm x 40(H)mm x 70(D)mm



5551215

5551215
Proving Unit

50-690 V proving unit with just two terminals to test AC and DC voltage detectors. Fast response and works with low impedance voltage testers. Ramps down through voltage levels. LED indication of functioning unit.

To ensure the safety of personnel working on electrical circuits BEST PRACTICE for the use of a proving unit before working on dead circuits.

Output voltage: 180V in to 6.8 Ω , 720V - 820V in to 10M Ω
Operating conditions: -10 to 40 C, 70% RH
Dimensions: W65 x H120 x D45mm

**5109219****5109219****GSB 18V-28 Combi Drill + 1X5.0AH Battery + Charger in L-Box**

Cordless impact drill / driver
GSB 18V-28

- 1 x quick charger
- 1 x Li-Ion battery

**5550101****5550101****Non-contact Voltage & Magnetic Indicator**

Detects the presence and polarity of magnetic fields produced by indicators, relays, solenoids and transformers. The integral self-test activates the sensor in the tip of the tester at 50Hz as well as checking the battery and LED. This proves that the unit is fully functional and avoids the need for a separate proving unit.

Operating Temperature: 0°C to 50°C
Overvoltage: CAT III 1000V, CAT IV 600V
Supply: 9V battery alkaline battery, MN1604 / PP3 or equivalent
Housing: Flame retardant ABS
Dimensions: 202 x 32 x 22mm

Voltage Range
• 100 to 600V AC

Frequency Range
• 50Hz to 50kHz

Sensitivity
• 3mm for 100V, 50Hz
• 23mm for 240V, 50Hz

Distances are from the tip of the unit to a flat PVC twin core and earth cable suspended in free space.

Indication
• Visual: Red LED
• Audible: 2kHz Tone

Magnetic Field Range
• +/- 10mT, 0 - 50kHz

Magnetic Pole
• North Pole: Red LED
• South Pole: Green LED



5500106

5500106

Differential Pressure Meter

Differential pressure measurement on gas hot water heaters or on filters of air conditioning systems, and also flow measurements in ventilation ducts using a Pitot tube: the compact differential pressure measuring instrument, which comes with a silicone connection hose and other useful accessories, can help you maintain and install systems in the sanitary and HVAC sector. Differential pressure measurement from 0 to 100 hPa. Flow measurement possible with a Pitot tube (available as an option). Magnets on the rear allow hands-free work. 10 units to choose from, display in pascals can be selected. Includes protection cap, belt holder, 2 x connection hoses, wrist strap, calibration protocol.



5500116

5500116

Contact Vane Anemometer

This vane anemometer measures air velocity and air temperature. Use it to carry out quick spot measurements at ventilation grilles (air outlets). The anemometer is also ideal for use outdoors. It displays the units m/s, km/h, fpm, mph and kts, and also calculates wind chill and the Beaufort wind force. Vane anemometer with permanently installed 40 mm vane. Practical: with single-point averaging, max/min and Hold function.

Includes protective cap, wrist strap, calibration protocol and batteries.



5551431

5551431

CBRE Branded Therma Waterproof Thermometer & K Type Waterproof Surface Probe

Therma Waterproof Thermometer with CBRE front label

Therma waterproof thermometer with thermocouple probe socket. The Therma Waterproof thermometer is housed in a robust waterproof black ABS case which offers IP66/67 protection. The thermometer utilises state of the art electronic circuitry, designed for reliability and ease of use and can be submerged or washed under a running tap - ideal for industrial applications.

The Therma Waterproof thermometer measures temperature over the range of -99.9 to 299.9 °C with a 0.1 °C resolution, auto-ranging to 1 °C resolution over the range of 300 to 1372 °C. The Therma Waterproof features a large easy to read, LCD display with max/min, hold, open circuit, low battery indication and an optional backlight. The unit also incorporates an auto-power off facility that automatically turns the instrument off after ten minutes, maximising battery life.

Each thermometer is housed in a durable, ABS case that incorporates an integrated rubber seal to ensure complete water tightness and help reduce the possibility of damage in harsh environments.

Meets the European Standard EN 13485

Temperature Probe: 8 x 130mm **Sensor Type:** Thermocouple




5500103

Gas Spillage Detector

Gas leaks on heating systems can quickly become a problem, because breathing in poisonous gases leads to health risks or even a risk of death. The detectors' back pressure indicator quickly and reliably detects escaping heating flue gases.

The handy instrument immediately gives an optical and acoustic alarm when gas is escaping. This means no visual contact with the measuring instrument is needed. The flexible probe even enables use in the tightest spaces or in inaccessible areas.

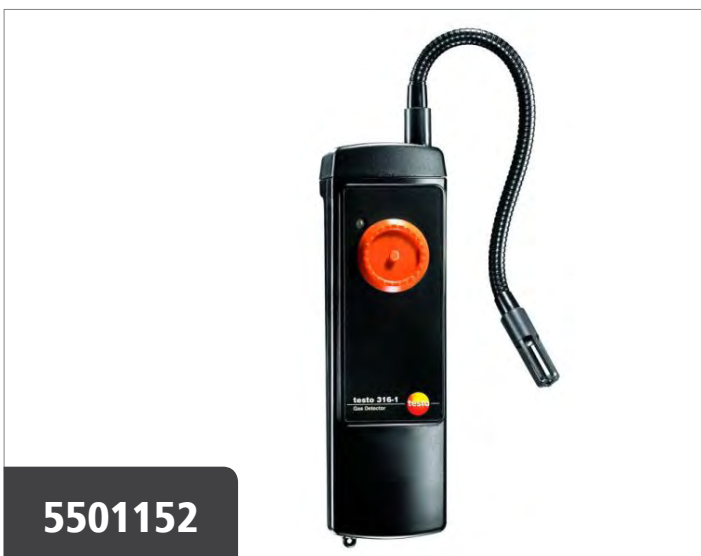

5501152

Gas Leak Detector for Pipe Work

Speedy and sure detection of gas leaks in natural gas pipes. This leak detector with two-stage visual alarm system is ideal for carrying out quick and reliable checks. Tested by DVGW.

This is an especially easy-to-use gas leak detector with an adjustable sensitivity dial. The leak detector is equipped with both a visual audible and an alarm. A yellow LED lights up when the reading is higher than 200 ppm CH₄. The LED changes to red when the reading is higher than 10 000 ppm CH₄. This special feature allows you to pinpoint the exact position of the leak. The leak detector is also equipped with a flexible gooseneck sensor for locating gas leaks in especially hard-to-reach or otherwise inaccessible places.



4350115

Clip Personal Carbon Monoxide (CO) Detector

4350115



5101346

5101346

GMS 120 Professional

The preferred multi-detector in its class

Most objects are found and application errors are avoided due to the automatic calibration. Detection of even deep-lying objects - up to a depth of 12 cm. Even more reliable detection of objects due to three-colour LED luminous ring.

Detectable Materials: Ferrous metals, non-ferrous metals, wooden studs, live cables

Max. detection depth: 120 mm

Detection depth, steel, max.: 120 mm

Detection depth, copper, max.: 80 mm

Detection depth of live cables, max.: 50 mm

Detection depth of wooden substructures, max.: 38 mm

Automatic deactivation, approx: 5 minutes

Display of max. drilling depth: False

Dust and splash protection: IP 54

Power supply: 1 x 9 V 6LR61

5501234

300 Longlife kit with printer - 300 Longlife flue gas analyser (O2, CO H2-compensated up to 30,000 ppm, NO)

The flue gas analyser with Longlife sensors is ideal for heating engineers who carry out installation and maintenance work on heating systems several times a day. It combines decades of experience in measuring technology with contemporary Smart-Touch operation, robust construction and e-mailing of reports. The testo 300 enables easy measurement of flue gas, draught, pressure, ambient CO and differential temperature. This kit includes a factory fitted NO sensor for NOx measurement.

High-quality sensor technology with up to 6 years' service life.

Delivery Scope:

- Longlife flue gas analyzer with O2 and CO H2-compensated sensor up to 30,000 ppm
- USB mains unit, including cable
- Modular flue gas probe, 180 mm; Ø 8 mm; Tmax 500°C; TÜV-tested; 2.2 m hose
- Spare dirt filters for modular flue gas probe; 10 off
- BLUETOOTH®/IRDA printer, including 1 roll of thermal paper and rechargeable battery
- Spare thermal paper for printer, indelible ink
- EasyHeat PC software
- Instrument case (height: 130 mm) for instrument, probes and accessories



5501234



5010124

Continuity Bond with Crocodile Clips (120cms)

Earthing is an important part of pipe installation, especially copper pipe where a static charge can build up very quickly and cause a spark if touched or discharged in some other way. It is a requirement of the Gas Safety Regulations that earthing and earth continuity must remain present on the whole gas pipeline if a gas meter, section of pipe or fitting is removed, creating a space in the pipeline.

These Continuity Bond with Crocodile Clips are a good quality, easy to use and fast way to maintain the continuity of a pipeline up to 1" or 28mm diameter. The cable used with this product is Tri rated BS6231 type CK.

- 10mm multi strand, tri rated to 600volts earth cable. BS6231 type CK.
- Fits up to 1" pipe.

Diameter (up to): 28MM Diameter: MM Diameter (from): OMM
Product height: 8.5CM Product length: 29.5CM Product width: 16CM



5552493

5551233 Kewstick DUO (Non-Contact Voltage Detector) ITEM USED FOR INDICATION ONLY

Unique dual sensitive non-contact voltage detector - just press and hold the desensitising button and you can differentiate between live and earthed cables approximately 10mm apart.

Key Benefits:

- Dual sensitivity
- Heartbeat - green LED indicates that the unit is on and working correctly
- Red LED indicates presence of voltage
- Audible tone also indicates the presence of voltage

Key Features:

- Clearly detects 90 - 600 volts AC without metal contact
- Two colour LEDs - Green for correct working and Red for Voltage detection
- Two tone buzzer, one for correct working and one for voltage detection
- Pocket-size for handy use anywhere
- Low power consumption circuits means long life batteries
- Cat IV rated
- 2 year unconditional guarantee (excluding batteries)

5551617 Non Contact Proving Unit

Portable proving unit for use on / off site that instantly proves the function of non-contact voltage testers before and after use.

Simple to use, just press the button and tests.

Belt clip for hands-free use.

Visual LED indication of function.

Robust and drop-proof from 1 metre.

Comes installed with a 9V battery.



5150004

5150004

Super Fire 2 Torch

The UK's No.1 Best Selling Torch. With its fully adjustable flame control as well as the constant flame mode and Guaranteed 360° Anti Flare, it is ideally suited for many different uses. Ideal for soft soldering and brazing. With the 1" thread connection is suitable for use with MAP/Pro™ and Propane. The SuperFire 2 can also be fitted with a Swirl Flame, or "Cool Tip" -with filter jet, for safer burning and a finer flame. The SuperFire 2™ is servicable and replacement parts are available for long service life.*Always remove the torch from the bottle and purge with gas between uses and for storage.

Dangerous goods indicator: Material is not a hazardous good

Product height: 4CM Product length: 30CM Product width: 11.5CM




5903204

5903204

185mm Ergo Plus® Fully Insulated VDE Pliers

Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic shape of head and handles allow user to access difficult working areas and still keep a tight grip on the workpiece. The pliers have following functions: flat cutter on the tip of the head for use on cable ties; wire stripper 1.5 and 2.5mm² wire; diagonal cutter for medium hard wire (3.5mm²), hard wire (2.5mm²) and piano wire (2mm²); crimper for terminals 1.5 and 2.5mm²; pattress screw cutter for M3.5 and M4 screws and wire looping device on underside of pliers for looping wire for plug screws/terminals. Display packed.

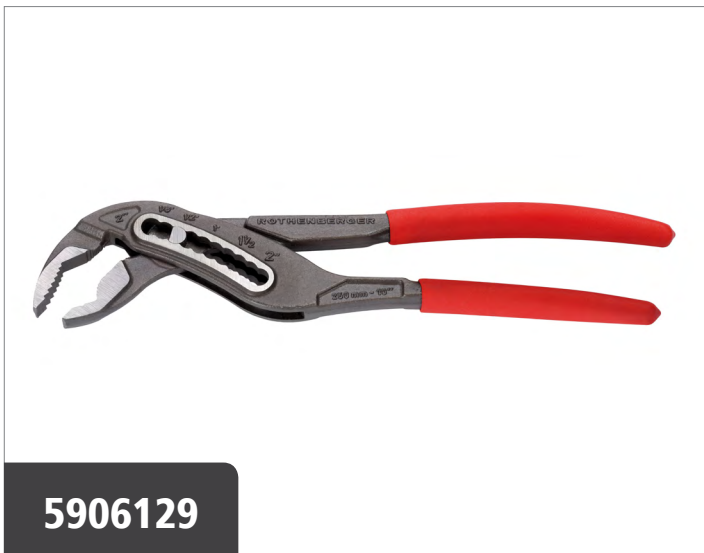

5906129

5906129

ROGRIP M 10"

Quickly adjustable water pump plier for clamping and rotating pipes of different materials up to Ø 2". Self-locking; 3-point support on the tube (important for clamping sleek tubes). Wide handles: For greater comfort and better power transfer. Easy to transport in a sturdy plastic rolling case. Non-slip plastic handles: High grip even when working with water and oil. Curve shape design: Reduces the risk of fingers getting clamped.

Diameter working range (up to): 2ZOLL
Length in cm: 25,20CM
Width in cm: 6,00CM
Height in cm: 1,80CM

Diameter working range (up to): 60MM
Diameter working range (from): 0MM



5601163

5601163

Pipe Repair Tool 15mm

This Pipe Repair is an instant and simple to use repair clamp for perforated metal, plastic and multi-layer pipes. It is re-usable, can withstand 10 bar (150 PSI) pressure and can even accommodate some leaking pipe fittings. Once fitted, the pipe can continue to function under normal pressures and temperatures till a permanent repair can be arranged.

Can be fitted to clipped pipe and whilst leak is still in flow.
Made in Britain, from NON TOXIC materials.
Excellent water saving and damage limitation device.

Product height: 3.5CM Product length: 17CM Product width: 9.3CM

Pressure working range (from) 0BAR
Pressure working range (up to) 10BAR



5950817

5950817

Pipe Repair Tool (22mm)

This is an instant and simple to use repair clamp for perforated metal, plastic and multi-layer pipes. It is re-usable, can withstand 10 bar (150 PSI) pressure and can even accommodate some leaking pipe fittings. Once fitted, the pipe can continue to function under normal pressures and temperatures till a permanent repair can be arranged.

- Can be fitted to clipped pipe and whilst leak is still in flow.
- Made in Britain, from NON TOXIC materials.
- Excellent water saving and damage limitation device

Product height: 2.5CM Product length: 19CM Product width: 9.2CM

Pressure working range (from): 0BAR
Pressure working range (up to): 10BAR



5150010

5150010

High Temperature Super Mat

The Super-Mat, High Temperature Soldering Mat gives maximum protection when carrying out soldering and other similar hot works. It gives protection up to 1260°C and also has a wipe clean silicone backing feature to ensure the cleanliness of the product for best results. This new improved version has increased heat protection with the Gold Vermiculite coating with Ecomab™ body soluble Class "0" Infiland and increased strength and integrity with the wire reinforced kevlar thread binding. The Plumbers Super-Mat can be used in tight spaces, corners and around pipework because of its flexible construction. This mat is also completely asbestos free.

Product height: 2CM
Product length: 23CM
Product width: 20CM



5012174

5012174
Tape - Gas Identification (38mm x 33m)



5012189

5012189
Pack of 5 rolls of Gas PTFE Tape




5010126

5010126
Standard Smoke Pellets (Tub 50 / 13g)




5010129

5010129
Encapsulated Smoke Pellets (Tub 10 / 5g)

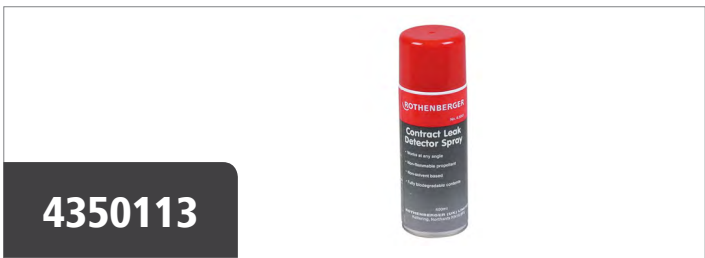

4350113

4350113
Contract Leak Detector Spray (400ml)

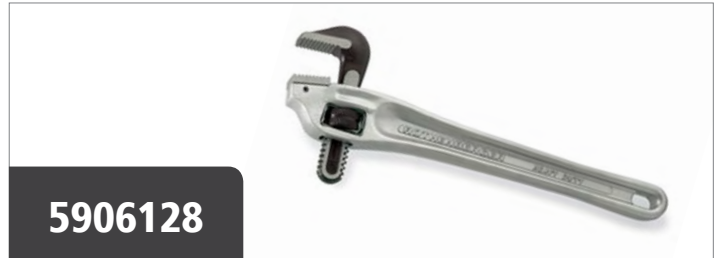


5906128

5906128
14" Aluminium Offset Wrench
One-handed corner wrench, 90°, 14"



5011756

5011756
Aluminium Pipe Wrench 10"
One-handed pipe wrench. Features similar to HEAVY DUTY. Weight savings of approx. 40%: extremely light, high strength aluminium alloy. Wearing parts replaceable: hook and heel jaw can be purchased separately.

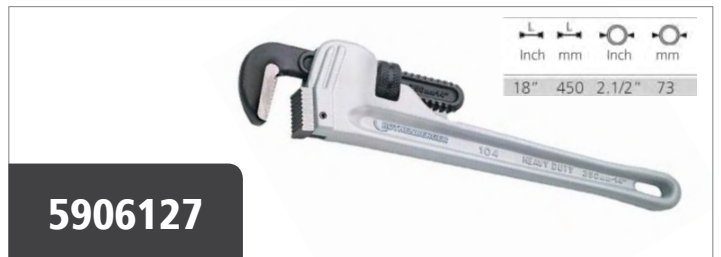

5906127

5906127
18" Aluminium Pipe Wrench
One-handed pipe wrench. Features similar to HEAVY DUTY. Weight savings of approx. 40%: extremely light, high strength aluminium alloy. Wearing parts replaceable: hook and heel jaw can be purchased separately.