





# CATALOGUE 2019

sales@morethansafety.co.uk **tel.** +44 (0)1489 780255 **www.morethansafety.co.uk** 22 Solent Industrial Estate, Shamblehurst Lane, Hedge End, Southampton, Hampshire, SO30 2FY



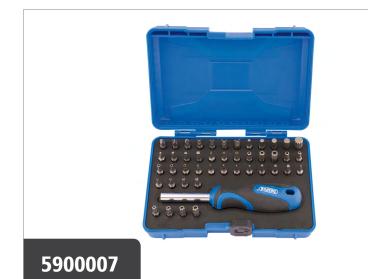



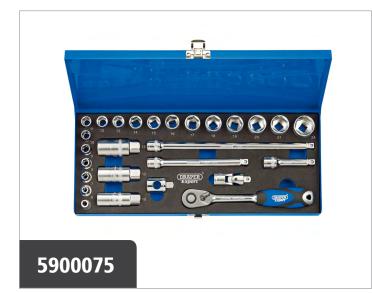

#### **5900007**

#### Security Screwdriver Bit and Driver Set (45 Piece)

25mm 1/4" bits manufactured from chrome vanadium steel, hardened and tempered with a shot blast finish. Supplied with a 1/4" soft grip driver. Supplied in a heavy duty storage case with plastic inlay to hold bits securely. Display packed. PZ TYPE products are compatible with \*Pozidriv®/Supadriv® fixing systems. Draper TX-STAR products are compatible with †Torx fixing systems.

Contents:

- Magnetic soft grip driver
- 3 x Tri wing: 1, 2 and 3
- 4 x Spanner: 4, 6, 8 and 10
- 5 x Spline: M4, M5, M6, M8 and M10
- 4 x Square: S0, S1, S2 and S3
- 6 x Security hex (metric): 2, 2.5, 3, 4, 5 and 6mm
  6 x Security hex (imperial): 5/32, 9/64, 1/8, 7/16, 3/32 and 5/64"
- 6 x Security nex (imperial): 5/32, 9/64, 1/8, 7/16, 3/32 and
   7 x Draper TX-STAR®: T5, T6, T7, T8, T10, T15 and T20
- 9 x Draper TX-STAR® security: T8T, T9T, T10T, T15T, T20T, T25T, T27T, T30T and T40T

#### 5903301

#### Metric Combination Spanner Set (11 Piece) Generally in accordance with DIN3113 Specifications

Expert Quality, forged from chrome vanadium steel hardened, tempered and chrome plated for corrosion protection. Draper HI-TORQ® ring end offset at 15°. Jaw offset at 15°. Supplied in Tetron divided wallet with tie cord. Display packed.

Contents: 6, 7, 8, 9, 10, 11, 12, 13, 14, 17 and 19mm.

### 5900075

# 3/8" Sq. Dr. Metric Socket Set in Metal Case (27 Piece)


# Manufactured and tested generally in accordance with DIN3122 and ISO3315 Specifications

Expert Quality, six point sockets made from chrome vanadium steel that's hardened and tempered with a micro satin finish. Supplied with a 72 tooth reversible soft grip ratchet and accessories. Each socket has a knurled ring for extra grip. Packed in a steel carrying case with EVA foam inserts.

#### Contents:

- 17 sockets size 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 24mm
- 3 spark plug sockets size 10, 12, 14mm
- 72 tooth reversible ratchet with soft grip handle and quick release button
- 3 wobble extension bars size 75, 150, 250mm
- \*'T' bar head 1/2" (F) x 3/8" (M) converter
- universal joint
- 3/8" sq dr x 1/4" hex adaptor. \*'T' bar head/converter when used with extension bar forms a sliding 'T' bar.



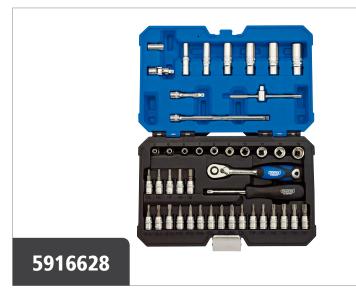



#### **5916628**

#### 1/4" Sq. Dr. Metric Socket Set (44 Piece) Manufactured and tested generally in accordance with

**DIN3122 and ISO3315 Specifications** Six point sockets made from chrome vanadium steel that's hardened and tempered with a micro satin finish. Each socket has a knurled ring for extra grip. Supplied with a 72 tooth reversible soft grip ratchet and accessories. Packed in tough plastic storage case.

#### Contents

- 10 sockets sizes 4, 5, 6, 7, 8, 9, 10, 11, 12, 13mm
- 6 deep sockets sizes 6, 8, 10, 11, 12, 13mm
- 72 tooth reversible ratchet with soft grip handle and quick release button
- spinner handle
   2 webble extension bars 50 and 1
- 2 wobble extension bars 50 and 150mm
- sliding T bar
- universal joint
  1/4" So Dr to 1/4" ho
- 1/4" Sq. Dr to 1/4" hex bit adaptor
  3 x plain slot socket bits 3, 5, 5.5mm
- 3 x plain slot socket bits 3, 5, 5.5r
  3 x PZ Type socket bits #1, 2, 3
- 3 x PZ Type socket bits #1, 2, 3
  3 x cross slot socket bits #1, 2, 3
- 5 x cross slot socket bits #1, 2, 5
  5 x hex socket bits 3, 4, 5, 6, 8mm
- 7 x Draper TX-STAR® socket bits T10, T15, T20, T30, T35, T40, T45

#### 5920194

## Ergo Plus<sup>®</sup> Interchangeable VDE Torque Screwdriver Set (19 Piece)

Manufactured and individually certified to EN 60900

Expert Quality, interchangeable VDE torque screwdriver, intended for electrical applications. Perfect for torque-controlled tightening of screws, which helps avoid damaging screws and tools whilst ensuring a safe and secure screw connection. The adjustment scope for the torque screwdriver is 1.0 - 5.0 Nm (accuracy +/- 6%). Individually tested to 10,000V and fully compliant to EN60900:2012 standards, permitting use on AC circuits up to 1000V and DC circuits up to 1500V. Suitable for attaching to all existing Draper Expert 965 interchangable range screwdrivers. The VDE interchangeable blades are made from SVCM steel for added strength and deliver a fast and easy press in auto-lock action with a simple release method. Supplied complete with calibration certificate, a selection of blades suiting all popular applications and a convenient canvas roll for secure transportation and storage. Display packed.

PZ TYPE products are compatible with \*Pozidriv®/Supadriv® fixing systems.

#### Contents:

- 1 Insulated torque screwdriver
- 1 Insulated Holder Driver
- 1 Precision Insulated Holder Driver
- 4 plain slot size: 3 x 60, 4.0 x 80, 5.5 x 80 and 6.5 x 100mm
- 3 cross slot sizes: No.0 x 60, No.1 x 80 and No.2 x 100mm
- 3 PZ TYPE sizes: No.0 x 60mm, No.1 x 80 and No.2 x 100mm
- 4 Draper TX-STAR®: T10, T15, T20, T25 x 100mm
- 2 PZ/SL: No.1 x 80 and No.2 x 100mm

MT5 MORE THAN SAFETY





## **5900068**


#### 'Pound Thru' Soft Grip Screwdriver Set (6 Piece)

Expert Quality, screwdrivers with hardened SVCM+ satin chrome plated hexagonal blades. Attached to a soft grip, oil and solvent resistant handle with integrated toughened 'Pound Thru' metal cap designed for receiving hammer blows. Supplied in a PVC storage case. Display packed.

Contents: Plain Slot; 5.5 x 75, 6.5 x 100mm Cross Slot; No.1 x 75, No.2 x 100mm

PZ Type; No.1 x 75, No.2 x 100mm



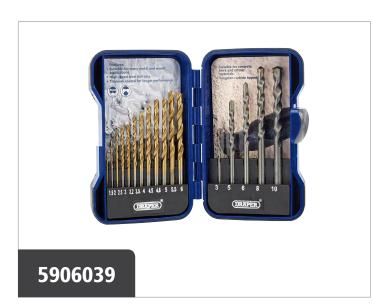

### 5905639

#### Metric Combination Spanner Set with Flexible Head and Double Ratcheting Features (8 Piece)

Expert Quality, unique ratcheting open-end design. Draper Expert HI-TORQ® 180° flexible head reversing ratchet ring requiring only 5° movement to turn fastener. Both ratcheting facilities are especially useful in confined spaces. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Display packed. Contents: 8, 10, 12, 13, 14, 15, 17 and 19mm

### 5906039

# Metric Combined HSS and Masonry Drill Bit Set (17 Piece)

12 titanium nitride coated high speed steel straight shank drills and five tungsten steel masonry drills in handy set. Display packed in soft grip plastic case. Contents: 12 titanium nitride coated HSS drills: 1.5, 2.0, 2.5, 3.0, 3.2, 3.5, 4.0, 4.5, 4.8, 5.0, 5.5 and 6.0mm: 5 masonry drills: 3.0, 5.0, 6.0, 8.0 and 10mm





# Metric Hexagon and Ball End Hexagon Key Set (9 Piece)

Hexagon keys with ball end on the long arm and conventional ends on short arm. The ball type hexagon tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Manufactured from chrome vanadium steel that's hardened and tempered then applied with a chemically blacked finish. Supplied in fold-out easy release holder which can be wall-mounted.

Contents: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0 and 10.0mm





## **5902390**

# Imperial Hexagon and Ball End Hexagon Key Set (12 Piece)

Hexagon keys with ball end on the long arm and conventional ends on short arm. The ball type hexagon tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Manufactured from chrome vanadium steel that's hardened and tempered then applied with a chemically blacked finish. Supplied in fold-out easy release holder which can be wall-mounted.

#### Contents:

1/16, 5/64, 7/64, 9/64, 5/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16 and 3/8".

### **5917242**

#### Metric Coloured Long Arm Draper TX-Star® Key Set (9 Piece)

Expert Quality, coloured, long arm, metric ball ended Draper TX-STAR® keys. Manufactured from chrome vanadium steel, hardened, tempered and chrome plated with a protective coloured rubber coating. Each colour signifies a different size. Supplied in fold-out easy release holder.

Contents: T10, T15, T20, T25, T27, T30, T40, T45, T50









#### **5904389**

#### 200mm VDE Long Nose Pliers

# Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, drop forged from chrome vanadium steel correctly hardened and tempered with additionally induction hardened cutting edges. Each plier has been tested to 10,000V for safe 1000V AC or 1500V DC live line working. Lacquered finish for corrosion protection with heavy duty, fully insulated, soft grip handles with slip guards. Display packed.

Length: 200mm Cut Hard Wire Dia. 1.6mm Cut Med/Hard Wire Dia. 3.6mm

#### 5904396

#### 250mm VDE Waterpump Pliers

# Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, drop forged from chrome vanadium steel correctly hardened and tempered. Each plier has been tested to 10,000V for safe 1000V AC or 1500V DC live line working. Lacquered finish for corrosion protection with heavy duty, fully insulated, soft grip handle. Has 'no-nip' feature which prevents handles locking together when at largest capacity and damaging users' hands. Display packed.

Capacity: 38mm

### **5904386**


#### **200mm VDE Combination Pliers**

# Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, drop forged from chrome vanadium steel correctly hardened and tempered with additionally induction hardened cutting edges. Each plier has been tested to 10,000V for safe 1000V AC or 1500V DC live line working. Lacquered finish for corrosion protection with heavy duty, fully insulated, soft grip handles with slip guards. Display packed.

Cut Hard Wire Dia: 2.3mm Cut Med/Hard Wire Dia: 3.8mm Length: 200mm








#### 180mm VDE Diagonal Side Cutter Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, drop forged from chrome vanadium steel correctly hardened and tempered with additionally induction hardened cutting edges. Each plier has been tested to 10,000V for safe 1000V AC or 1500V DC live line working. Lacquered finish for corrosion protection with heavy duty, fully insulated, soft grip handles with slip guards. Display packed.

Cut Hard Wire Dia: 2.3mm Cut Med/Hard Wire Dia: 3.0mm Cut Soft Wire Dia: 4.0mm Length: 180mm

## 5904392

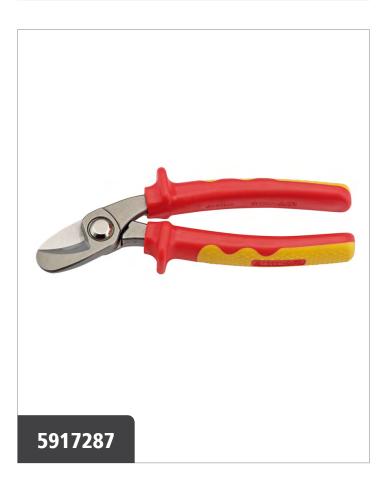


### **5917287**

#### VDE Approved Fully Insulated Cable Shears (180mm) Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, 180mm cable shear, manufactured from chrome vanadium steel that's hardened and tempered for extra strength. The induction hardened and finely ground cutting edges are finished with a protective lacquer for corrosion protection. Fitted to heavy duty, fully insulated soft grip handles, tested to 10,000V for safe 1000V AC or 1500V DC live line working.



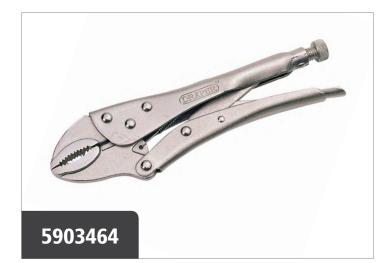

#### 5903464

#### Curved Jaw Self Grip Pliers (220mm)

Jaws manufactured from good quality steel hardened and tempered. Serrated gripping surfaces and adjustable opening, with quick-release lever. Display packed.

Length: 220mm



#### 5901238

#### Soft Grip Trimming Knife with 'Safe Blade Retractor' Feature

Expert Quality, retractable pattern with special blade feature allows blade to retract automatically when surface contact is lost even when thumb pressure is maintained. Diecast zinc alloy body with anti-slip soft grip handle for user comfort. Supplied with five spare blades. Display packed.



#### 5916633 Junior Hacksaw

Expert Quality, 150mm junior hacksaw made with a steel frame with an soft grip plastic handle. Supplied with blade.



## 5900114 Soft Grip Hacksaw (300mm)

Expert Quality, ergonomic pattern aluminium frame with a soft grip handle for user comfort. Frame has two sets of blade spigots which allows straight or 45° cutting. Supplied with a 300mm bi-metal blade.





#### **Tool Lanyard Single Carabiner**

Durable 1680D shock absorbing poly webbing. Aluminium alloy carabiner with captive eye. Treaded loop end that grips the tool when attached. Low-profile lightweight design reduces snag hazards.

Size: Standard 35" - 42" (89 -110cm)



#### 5906124 Wrist Tool Lanyard

Polyester webbing cuff secures to wrist. Energy-absorbing ribbed pull cord. Adjustable barrel lock for tool attachment. Short length improves the drop clearance needed.

Wrist Measurement S/M 5" - 7" (13cm - 18cm). Wrist Measurement L/XL 7" - 81/2" (18cm - 22cm).

Sizes Available: SM - LXL



### 5115122 Open Mouth Tool Bag (440mm)

Open mouth design tool bag with 13 internal and 6 external pockets for excellent organisation potential. Fitted with a padded shoulder strap and grip handle for added user comfort. The solid base keeps tools safe from damage and protects the bag from moisture and dirt. Made from 600 denier hardwearing fabric that's strong and durable.

Dimensions: 440 x 245 x 335mm



### 6202048 Technicians Toolbag

Technicians toolbag. Bag can be fully opened with zip, multiple pockets for hand tools, laptop and documents, plenty of room for additional equipment, suitable for all common laptops, tool side bag, can be removed and used separately.

Dimensions: 47 x 35 x 22cm.





#### 5900069

#### Opti-Vision<sup>™</sup> Torpedo Level with Magnetic Base (250mm)

Expert Quality, heavy duty cast aluminium level torpedo level with highly visible horizontal 'Opti-Vision' solid acrylic UV resistant vial set into the angles surface, one solid acrylic vertical vial and one angle finder solid acrylic vial all set within tough red housings for maximum visibility. Electrostatically epoxy powder coated and baked for maximum protection, shock absorbing end caps. The base has a finely milled surface, a V-groove for levelling pipework and two inset rare earth magnets. Accuracy 0.5mm per  $1M = 0.029^{\circ}$  in standard position.



## 5916635

# Storm Force<sup>®</sup> 10.8V Cordless Hammer Drill with LI-ION Battery

- Fitted with a 25Nm variable speed motor
- 21 torque control positions
- 3 functions; drill, hammer drill and screwdriver
- Attached with a 10mm keyless chuck, super bright LED worklight, metal belt clip and a battery level indicator
- Supplied with a 10.8V 1.5Ah lithium battery and a 1 hour charger

Drilling capacities: Wood: 25mm Masonry: 10mm Mild steel: 10mm

Speed (no load): 0-400 and 0-1300r/min

Max. torque: 25Nm

Weight (machine and battery): 1kg



# **5916634** Slimline COB LED Rechargeable Magnetic Inspection Lamps (5W) Colour: Green

5W inspection lamp fitted with an additional SMD LED's on the end transforming the lamp into torch. The 3 cycle switch allows half/full/ torch features. Powered by a rechargeable Li-ion battery providing an impressive 450 lumens inspection light and a 250 lumen torch. The base is manufactured with an integrated magnet with protective cover and pivoting head enabling the light to be used in any 360° position. Supplied with micro USB to standard USB cable and 3 pin approved USB charger. Battery: 3.7V Li-ion Battery.

Burn Time: 4.5 hrs Charging Time: 4 hrs

IP Rating: IPX4





# 150mm Crescent-Type Adjustable Wrench with Phosphate Finish

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with black phosphate finish, polished profile and jaws. Jaws offset at 22°. The 150, 200, 250 and 300mm sizes have a graduated scale on the fixed jaws. Suitable for use in areas where chemicals and chrome plate can give off poisonous fumes. Display packed.

Capacity: 24mm Length: 150mm





## 5903950

# 250mm Crescent-Type Adjustable Wrench with Phosphate Finish

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with black phosphate finish, polished profile and jaws. Jaws offset at 22°. The 150, 200, 250 and 300mm sizes have a graduated scale on the fixed jaws. Suitable for use in areas where chemicals and chrome plate can give off poisonous fumes. Display packed.

Capacity: 33mm Length: 250mm

#### **5903951**

# 300mm Crescent-Type Adjustable Wrench with Phosphate Finish

Expert Quality, crescent-type wrenches manufactured from chrome vanadium steel hardened and tempered with black phosphate finish, polished profile and jaws. Jaws offset at 22°. The 150, 200, 250 and 300mm sizes have a graduated scale on the fixed jaws. Suitable for use in areas where chemicals and chrome plate can give off poisonous fumes. Display packed.

Capacity: 38mm Length: 300mm





## **5904257**

### 560g (20oz) Fibreglass Shafted Claw Hammer

Expert Quality, polished face solid forged head from fine grain high carbon steel correctly hardened and tempered with a lacquer coating for rust protection. Solid fibreglass core shaft fitted with shock absorbing PP/TPR grip. Sold Loose.



## **5904258**

Weight: 450g (16oz)

### 450g (16oz) Fibreglass Shafted Ball Pein Hammer

Expert Quality, polished face solid forged head from fine grain high carbon steel correctly hardened and tempered with a lacquer coating for rust protection. Solid fibreglass core shaft fitted with shock absorbing PP/TPR grip. Sold Loose.

Weight: 560g (20oz)



# 5930206

#### Gasket Scraper

Manufactured from carbon steel hardened, tempered and satin chrome finish with shot blast scraper end. For cleaning cylinder heads, removing old sealants and carbon, etc. Display packed.



## **5950237**

### 355mm Pry Bar / Nail Puller

Flat section with nail puller and chisel ends 35mm wide. Forged from good quality carbon steel hardened, tempered and painted black. Sold loose.

Size: 150mm Type: Half Round



## **5917737**

#### 150mm Hand File and Handle

High carbon steel, hardened and tempered with soft grip handles incorporating hang hole. Improved tooth profile for increased performance.

Size: 150mm Type: Hand



## **5917738**

### 150mm Half Round File and Handle

High carbon steel, hardened and tempered with soft grip handles incorporating hang hole. Improved tooth profile for increased performance.

Size: 150mm Type: Half Round






**5300703 4 Heavy Duty AAA-Size Alkaline Batteries** 4 Heavy Duty AAA-Size Alkaline Batteries



**5300702 4 Heavy Duty AA-Size Alkaline Batteries** 4 Heavy Duty AA-Size Alkaline Batteries



## **5950509**

#### 150mm / 6" Steel Rule

Double sided with hang hole. Permanently etched graduations of cm/mm and inches, 1/8", 1/16", 1/32" and 1/64". Display packed.

Length: 150mm/6" Width: 19mm



## 5916631

#### Measuring Tape (5m / 16ft x 25mm)

**Manufactured to EC Class II Accuracy** Expert Quality, tough impact resistant ABS case. Hold and measure button allows user to lock tape for accurate measurements. Power return nylon-coated tape has metric and imperial graduations. Fitted with a belt clip for added user portability.

Length: 5m / 16ft

Width: 25mm



## **5904265**

### Card of 5 Hooked Trimming Knife Blades

Reversible polished steel blades with accurately ground cutting edges.

Type: 2 notch (hooked)



## **5210647**

### Cree and COB LED Head Lamp (3W)

Three function head lamp (100% white light / 50% white light / red light), fitted with a comfortable adjustable head strap with foam padding. Producing an ultra bright 220 lumen 80M beam of brilliant white light. The ON/OFF button is easily operated. Display packed.





#### 10 x 300mm 24TPI B-Metal Hacksaw Blades Conforms to BS 1919

Expert Quality, saw edge, manufactured from high speed steel strip, electron beam welded to high quality carbon steel backing. Display packed ten blades per card.



## 6800419

#### 10 x Junior Hacksaw Blades Manufactured to BS6271

Expert Quality, general purpose cutting blades with pinned ends. Will fit all junior hacksaw frames. Packed ten blades on display card or in bags of 100 blades.

Pitch: 24



## **5904925**

#### **Professional Utility Key**

Expert Quality, with two square, one triangle and one stepped key profile plus a double-ended 7mm plain/No.2 cross slot insert bit 40mm long. Holder included for 1/4" insert bit. Display packed.



## 7200134

### Stainless Steel Fill Brush (230mm)

Plastic handle. For aggressive cleaning and removal tasks. Display packed.

Wires per row: 3 x 11



## **5917739** Magnetic Parts Bowl

150mm diameter, stainless steel, magnetic parts bowl. Manufactured from high grade steel and fitted with a strong magnet on the base.



# 6201944

### Magnetic Parts Bowl

For storage of nuts, bolts, screws, etc. whilst working. Bowl has rubber covered magnetic base for affixing to metal objects such as tool boxes etc. Magnetism transfers to inner surface of bowl to retain small metal parts, nuts, bolts, etc. Sold loose.

Diameter: 145mm





# 8 x 10m x 19mm Black Insulation Tape to BSEN60454 / Type 2

**Manufactured to EN60454 / Type2 Specifications** Expert Quality, PVC self-extinguishing flame resistant tape manufactured under strict quality control. Security wrapped eight rolls per pack.



## 5950774

#### 5950774

# 8 x 10m x 19mm Grey Insulation Tape to BSEN60454 / Type 2

**Manufactured to EN60454 / Type2 Specifications** Expert Quality, PVC self-extinguishing flame resistant tape manufactured under strict quality control. Grey tape compatible with BS7671:2001 Harmonised Cabling. Security wrapped eight rolls per pack.



### 5950139

# 8 x 10m x 19mm Blue Insulation Tape to BSEN60454 / Type 2

**Manufactured to EN60454 / Type2 Specifications** Expert Quality, PVC self-extinguishing flame resistant tape manufactured under strict quality control. Security wrapped eight rolls per pack.



## 5950775

# 8 x 10m x 19mm Brown Insulation Tape to BSEN60454 / Type 2

**Manufactured to EN60454 / Type2 Specifications** Expert Quality, PVC self-extinguishing flame resistant tape manufactured under strict quality control. Brown tape compatible with BS7671:2001 Harmonised Cabling. Security wrapped eight rolls per pack.



## 5950137

# 8 x 10m x 19mm Yellow Insulation Tape to BSEN60454 / Type 2

**Manufactured to EN60454 / Type2 Specifications** Expert Quality, PVC self-extinguishing flame resistant tape manufactured under strict quality control. Security wrapped eight rolls per pack.



## 5650568

#### Insulation Earth Colour Tape Manufactured to EN 60454 Specifications

Expert Quality Self-adhesive PVC earth colour tape. Shrink wrapped and sold loose.







#### 5921001

#### **Ergo Plus® Slimline VDE Approved Fully Insulated Screwdrivers (6 Piece)**

**Manufactured and individually certified to EN 60900** Expert Quality, with an insulated sheath the same diameter as the blade, enabling the tip access to deep seated screws found in terminals and switch boards. Tested to 10kV, suitable for working on live circuits of 1kV AC and 1.5kV DC. SCVM steel blades hardened, tempered and chemically blackened. Display packed.

PZ TYPE products are compatible with \*Pozidriv®/Supadriv® fixing systems. \*Pozidriv®/Supadriv® are registered trademarks of Trifast Plc.

Contents: 3 plain slot sizes: 3.5 x 100, 4.0 x 100, 5.5 x 125mm 1 cross slot sizes: No.2 x 100mm 2 PZ TYPE: No1 x 80mm and No. 2 x 100mm

## 5551284

#### 1000A Ultra Slim Clamp Meter

Ultra slim and lightweight 1000A clamp with 0.01A resolution

#### **Key Benefits**

Slim, lightweight high capacity clamp meter from the world leaders in clamps. DMM functionality G7 test leads

#### **Key Features**

10mm Jaw thickness Tear drop jaw shape for easy access in to distribution boards 1000A Current measurement 0.01 A resolution AC Voltage measurement up to 600V 1mV Resolution AC V DC Voltage measurement up to 600V 0.1mV Resolution DCV Resistance measurement Continuity buzzer Fuseless electronic protection on up continuity up to 600V Comes with popular G7 test leads Includes carry case with belt loop

Safety: IEC 61010-1 CAT.III 600V Pollution degree 2 (AC A), CAT.III 300V / CAT.II 600V Pollution degree 2 (AC/DC V)

IEC 61010-031, IEC 61010-2-032, IEC 61326 (EMC)

#### Included:

Test leads Carry pouch with belt loop Batteries Manual





#### Socket Tester

Checks correct socket outlet wiring. Checks the quality of the earthing that is essential for safe installations. Checks for the polarity of the mains supply. Checks RCDs with measured current. Bright LEDs. Easy to use - anything other than green needs checking out.



## 5101346 GMS 120 Professional

The preferred multi-detector in its class

Most objects are found and application errors are avoided due to the automatic calibration. Detection of even deep-lying objects - up to a depth of 12 cm. Even more reliable detection of objects due to three-colour LED luminous ring.

Detectable Materials: Ferrous metals, non-ferrous metals, wooden studs, live cables Max. detection depth: 120 mm Detection depth, steel, max.: 120 mm Detection depth, copper, max.: 80 mm Detection depth of live cables, max.: 50 mm Detection depth of wooden substructures, max.: 38 mm Automatic deactivation, approx: 5 minutes Display of max. drilling depth: False Dust and splash protection: IP 54

Power supply: 1 x 9 V 6LR61







#### 5551188

#### 2 Pole LED Voltage Tester

#### **Key Benefits**

Clear oversize luminous LEDs shine through voltage level Clear audible tone UK Specific GS38 Slender probe tips NO NEED to swap ends Bright torch light - gives ample illumination Fits into recessed terminals such as RCBOs without unscrewing any caps

Phase Rotation - Bright green LEDs show left or right rotation.

#### Indicates actual voltage if no batteries fitted

Two pole testers that use batteries should indicate a live circuit if the batteries die or have not been inserted into the tester.

This is normally indicated by a single LED but this does not indicate the actual voltage present.

The KT1780 & KT1790 have a separate circuit so they operate with no batteries or dead batteries and still indicate the actual voltage present.

#### **Key Features**

AC & DC Voltage tests up to 690V Clear Oversize luminous LED indication Soft to touch overmoulded rubber body **Continuity Test** Self diagnostic test Single Pole phase test Phase Rotation test Polarity indication Auto power on/off IP65 rating protects against Dust & Water ingress Designed to the new international safety standards IEC 61243-3 & IEC 61010-1 Cat IV 600V

Included: Built in test leads, Batteries Instruction manual with Certificate of Conformity

Weights & Dimensions: Boxed Weight: 242g Boxed Dimensions: 300(H)mm x 40(H)mm x 70(D)mm

## 5551215

#### **Proving Unit**

50-690 V proving unit with just two terminals to test AC and DC voltage detectors. Fast response and works with low impedance voltage testers. Ramps down through voltage levels. LED indication of functioning unit.


To ensure the safety of personnel working on electrical circuits BEST PRACTICE for the use of a proving unit before working on dead circuits.

Output voltage: Dimensions:

180V in to 6.8  $\Omega$  , 720V - 820V in to 10M  $\Omega$ Operating conditions: -10 to 40 C, 70% RH W65 x H120 x D45mm





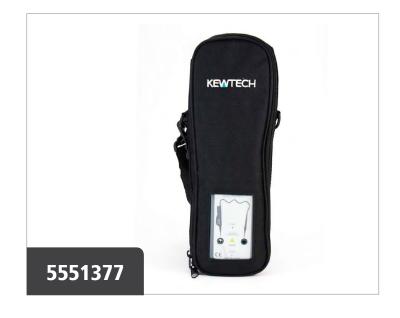

#### Kitbag 3 for 2 Pole LED Voltage Tester

Carrying case for 2 Pole LED Voltage Tester. Branded zip kit bag with clear window. Case has 2 holes in proving unit storage section for testing without removal.

Dimensions: Length 31cm Width: 13cm

Material - cloth with carrying strap

Depth: 9cm



## 5551233

#### Kewstick DUO (Non-Contact Voltage Detector) **ITEM USED FOR INDICATION ONLY**

Unique dual sensitive non-contact voltage detector - just press and hold the desensitising button and you can differentiate between live and earthed cables approximately 10mm apart.

Key Benefits:

- Dual sensitivity •
- Heartbeat green LED indicates that the unit is on and working . correctly
- Red LED indicates presence of voltage .
- Audible tone also indicates the presence of voltage •

#### Key Features:

- Clearly detects 90 600 volts AC without metal contact •
- Two colour LEDs Green for correct working and Red for Voltage • detection
- Two tone buzzer, one for correct working and one for voltage detection
- Pocket-size for handy use anywhere .
- Low power consumption circuits means long life batteries •
- Cat IV rated •
- 2 year unconditional guarantee (excluding batteries) •

## 5551617

#### **Non Contact Proving Unit**

Portable proving unit for use on / off site that instantly proves the function of non-contact voltage testers before and after use.

Simple to use, just press the button and tests. Belt clip for hands-free use. Visual LED indication of function. Robust and drop-proof from 1 metre. Comes installed with a 9V battery.









#### Yale Spectacles Clear

Ultra lightweight, wrap around design, contoured shape, polycarbonate lens (PC lens), soft nose bridge, non slip coloured rubber tips

Conform to EN166:

- Optical Class:1
- F (Low impact energy)
- 2C-1.2 UV Filter
- Cat 2 Intermediate Risk





### 1751238

#### Arc Flash Glove 8.2 Cal

18-gauge flame-resistant arc flash glove with neoprene palm. 1125 Grams of Cut protection. World's first 18g Arc Flash Glove. 18g Kevlar® composite filament fiber shell of protection. Arc-flash tested for level 2, rated ATPV = 8.2 cal/cm2. Flame-resistant neoprene palm coating for better grip. Touchscreen compatible.

Sizes: 5 - 11 Applications: Petro Chemical, Utilities, Oil and Gas