



# GAS TOOLKIT



5902373

### 5902373

#### Hi-Torq® Metric Combination Spanner Set (12 Piece) Generally in accordance with DIN3113 Specifications

Expert Quality, with Draper Expert HI-TORQ® deep offset pattern ring end. Open end set at 15°. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Supplied on wall mountable plastic rack. Display packed.

Contents: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19 and 22mm



5902361

### 5902361

#### Imperial Combination Spanner Set (11 Piece) Generally in accordance with DIN3113 Specifications

Expert Quality, forged from chrome vanadium steel hardened, tempered and chrome plated for corrosion protection. Draper HI-TORQ® ring end offset at 15°. Jaw offset at 15°. Supplied in Tetron divided wallet with tie cord. Display packed.

Contents:

1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16 and 7/8" AF



5905956

### 5905956

#### Draper Hi Torq® Metric Flexible Head Ratcheting Combination Spanner Set (7 Piece)

Open end set at 15°. The Draper HI-TORQ® flexible head allows movement through 180°. Only 5° movement required to turn fastener, especially useful in confined spaces. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Display packed.

Contents: 8, 10, 12, 13, 14, 17 and 19mm



5916919

**5916919**  
**Multi-Drive® Metric Socket Set, 3/8" Sq. Dr. (42 Piece)** Expert Quality, Multi - Drive® socket, made from chrome vanadium steel that's hardened and tempered with a micro satin finish. Supplied with a 72 tooth reversible soft grip ratchet and accessories.  
 26 Draper Expert Multi-Drive® sockets  
 2 Draper Expert HI-TORQ® spark plug sockets 10 and 14mm  
 Sockets are multi-drive, which allows them to be used with hexagon, bi-hexagon (metric and AF) and Draper TX-STAR® fixings  
 Bit holder and 8 bits, 6 accessories. Chrome vanadium steel hardened, tempered and satin chrome plated for corrosion protection



6210114

**6210114**  
**Mobile Tool Chest**  
 Expert Quality  
 Tool box on heavy duty wheels manufactured from tough durable plastic with integral telescopic transport handle  
 Supplied with tote tray and tool box lid with strap for holding a spirit level  
 Bar locking handle secures the lid which has a padlock eye for security  
 Graduated V groove in lid for cutting wood etc.  
 tool box (external): 740 x 450 x 490mm  
 tool box (internal): 680 x 380 x 380mm



5900506

**5900506**  
**Ball End Metric Hexagon Key Set (8 Piece)**  
 Manufactured from chrome vanadium steel that's hardened and tempered. The ball end tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Fitted in pocket-size plastic storage holder with non-slip grip. Display packed.  
 Contents: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 and 8.0mm.



5902390

**5902390**  
**Imperial Hexagon and Ball End Hexagon Key Set (12 Piece)**  
 Hexagon keys with ball end on the long arm and conventional ends on short arm. The ball type hexagon tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Manufactured from chrome vanadium steel that's hardened and tempered then applied with a chemically blacked finish. Supplied in fold-out easy release holder which can be wall-mounted. Contents: 1/16, 5/64, 7/64, 9/64, 5/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16 and 3/8".



5900040

**5900040**

**Heavy Duty Soft Grip Hacksaw (300mm)**

Expert Quality, steel frame with aluminium handles. Frame has two sets of blade spigots which allows straight or 45° cutting. Supplied with a 300mm bi-metal blade.



6800139


**6800139**

**10 x 300mm 24TPI B-Metal Hacksaw Blades**

**Conforms to BS 1919**

Expert Quality, saw edge, manufactured from high speed steel strip, electron beam welded to high quality carbon steel backing. Display packed ten blades per card.

Pitch: 24

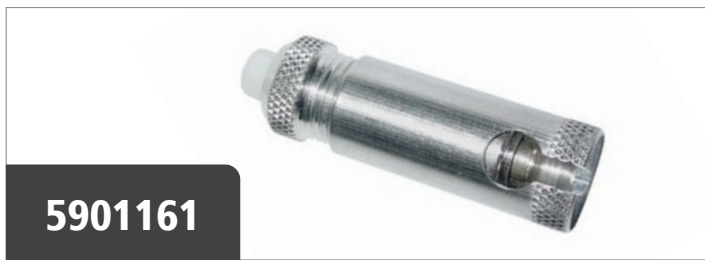


5901161

**5901161**

**Thermocouple Tester**

Used for testing the correct operation of thermocouples. The thermocouple to be tested is assembled into the unit and the tip heated whilst depressing the white button. If the thermocouple is functioning correctly the plunger will remain depressed for approx. 20/30 seconds, simulating the operation of a gas valve.

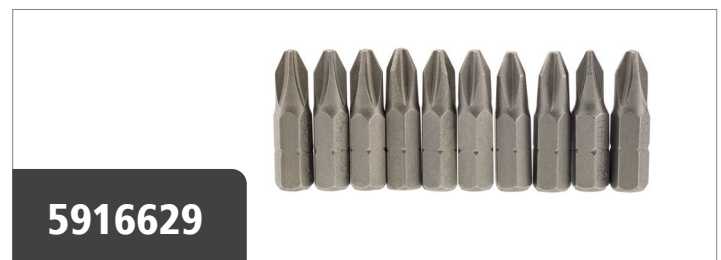

5916629


**5916629**

**No. 2 1/4" Hex. Cross Slot Insert Bit 25mm Long x 10**

Chrome vanadium steel hardened, tempered with a shot blasted finish. Supplied in 1, 2, 5 or 10's. Display packed.

Length: 25mm

Size: No.2

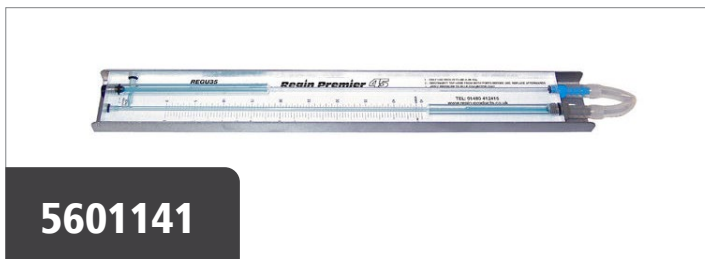

5601141

**5601141**

**Premier 45 Manometer**

A solid acrylic gauge in a tough metal casing. Measures to 18in.w.g. or 45 mbar. Easy zero adjustment and a clear accurate scale. Blue fluid for ease of reading in poorly lit locations. Trap chambers reduce the possibility of fluid loss through spillage or overpressure. Hanging slot and strap. Overall length - approx. 18" (450mm). Supplied in a nylon protective bag. Please note: use only 1.88 SG fluid (please contact MTS for details on this specific item). Spares available.



5120111

**5120111**

**Numatic (Henry Type) 230V Vacuum Cleaner**



5552691

**5552691**

The KT1700 is your first level of protection against electrical shock when approaching metal enclosures / potentially live metal work. The identification of the live phase is more certain than using non-contact voltage indicators or similar devices.

- Indicates 50-600V AC
- Flashing red LED with audible tone when voltage is present
- Designed to work with PPE



5968944

**5968944**

**FP44 - Quick Connect Tool Lanyard**

A versatile tool lanyard which prevents falling objects from a height. Specifically designed to be interchangeable with FP45, suitable for quick and easy exchanges of multiple tools. One size.

- Allows quick and easy attachment/detachment of tools
- Prevents dropped and falling objects
- Ultra lightweight for long uses, Ergonomic and versatile



5210893

**5210893**

**Elite Focus LED Torch**

Focus High-Performance LED Torches are manufactured from anodised aluminium, these torches are lightweight, strong, durable and reliable.

**Specifications:**

- Output: 100/30 lumens
- Beam Distance: 50m
- Run Time: 1.5/3 hours
- Power: 2 x AAA alkaline batteries (supplied)
- Size: 140 x 16/13.5mm
- Weight: 31g exc. Batteries



52101569

**52101569**

**Elite LED Multifunction Headlight 280 lumens**

The Lighthouse Elite LED Multifunction Headlight offers four output options; a high performance XPG LED for high and low spot beam output, and COB LED (Chip On Board) side lights for wide angle beam or red flashing functions.

- Output: 100/280 lumens
- Run Time: 3.5/7 hours Power: 3 x AAA batteries (supplied)





5112482

**5112482**  
**RCD Adaptor (Circuit Breaker)**

The Faithfull FPPRCD RCD Safety Adaptor Plug simply plugs into the mains, then you plug your electrical appliance into it. If there is a fault or a short in the tool you are using, the unit cuts the power very quickly, reducing the risk of electrocution

- Not for use on ponds as when disconnected the protection will be lost.
- Safety RCD (Circuit Breaker)
- Can be used with any 240V appliance.
- Particularly recommended for use with power tools.

**Technical Specification:**  
Can be used with any 240V appliance.  
1 x Socket



5900298

**5900298**  
**230V Four Socket Cable Reel, 25m**

Four socket cable reel attached with a sturdy plastic case with integrated carry handle and easy wind action. Fitted with thermal cut out switch. 1.25mm cable. Maximum load fully unwound 13A, 3120W. Fitted with approved plug. Sold loose.

\*Maximum load fully unwound. If the extension cable is used not fully unwound then the max. load is reduced to 5A.

- Complies with BS1363A and EN61242 Specifications
- Thermal cut out switch
- Four socket cable reel
- 1.25mm<sup>2</sup> cable
- Maximum load fully unwound 13A, 3120W
- Easy wind action



5210648

**5210648**  
**COB LED Rechargeable Worklight, 10W, 800 Lumens**

Ultra - bright light output (10W = 800 lumens). The much improved battery life is due to the internal li-ion battery and low energy COB LED consumption. The frame and housing made from good quality cast aluminium manufactured to IP65 standard. Due to COB LED technology the unit produces very little heat making it ideal for use in confined spaces.

- Improved battery life
- Li-ion battery and low energy COB LED consumption
- Frame and housing made from good quality cast aluminium
- IP65 standard
- Tiny heat making it ideal for use in confined spaces



6200279

### 6200279

#### Technicians Tool Case

Expert Quality, manufactured from water repellent polyester with adjustable carrying handle and detachable shoulder strap. Multiple internal and external pockets for storing tools, equipment and computers etc. Packed in polythene bag with display card.

Dimensions: 470 x 150 x 300mm



6200241

### 6200241

#### 16 Pocket Tool Pouch

Expert Quality, nylon tool pouch, comprising 16 pouches of varying sizes, hammer loop, measuring tape clasp and chain. Supplied with 50mm wide adjustable webbing belt. Display carton.



6030084

### 6030084

#### Combustion Mobile LOTO Kit

Colour of Bag: black and white



5921001

### 5921001

#### Ergo Plus® Slimline VDE Approved Fully Insulated Screwdrivers (6 Piece)

**Manufactured and individually certified to EN 60900**

Expert Quality, with an insulated sheath the same diameter as the blade, enabling the tip access to deep seated screws found in terminals and switch boards. Tested to 10kV, suitable for working on live circuits of 1kV AC and 1.5kV DC. SCVM steel blades hardened, tempered and chemically blackened. Display packed.

PZ TYPE products are compatible with \*Pozidriv®/Supadriv® fixing systems. \*Pozidriv®/Supadriv® are registered trademarks of Trifast Plc.

Contents: 3 plain slot sizes: 3.5 x 100, 4.0 x 100, 5.5 x 125mm  
1 cross slot sizes: No.2 x 100mm  
2 PZ TYPE: No.1 x 80mm and No. 2 x 100mm



5551284

### 5551284

#### 1000A Ultra Slim Clamp Meter

Ultra slim and lightweight 1000A clamp with 0.01A resolution

#### Key Benefits

Slim, lightweight high capacity clamp meter from the world leaders in clamps.

DMM functionality

G7 test leads

#### Key Features

10mm Jaw thickness

Tear drop jaw shape for easy access in to distribution boards

1000A Current measurement

0.01 A resolution

AC Voltage measurement up to 600V

1mV Resolution ACV

DC Voltage measurement up to 600V

0.1mV Resolution DCV

Resistance measurement

Continuity buzzer

Fuseless electronic protection on up continuity up to 600V

Comes with popular G7 test leads

Includes carry case with belt loop

Safety: IEC 61010-1 CAT.III 600V Pollution degree 2 (AC A), CAT.III 300V / CAT.II 600V Pollution degree 2 (AC/DC V)

IEC 61010-031, IEC 61010-2-032, IEC 61326 (EMC)

#### Included:

Test leads

Carry pouch with belt loop

Batteries

Manual





5551188

## 5551188 2 Pole LED Voltage Tester

### Key Benefits

- Clear oversize luminous LEDs shine through voltage level
- Clear audible tone
- UK Specific GS38 Slender probe tips NO NEED to swap ends
- Bright torch light - gives ample illumination
- Fits into recessed terminals such as RCBOs without unscrewing any caps
- Phase Rotation - Bright green LEDs show left or right rotation.

### Indicates actual voltage if no batteries fitted

Two pole testers that use batteries should indicate a live circuit if the batteries die or have not been inserted into the tester.

This is normally indicated by a single LED but this does not indicate the actual voltage present.

The KT1780 & KT1790 have a separate circuit so they operate with no batteries or dead batteries and still indicate the actual voltage present.

### Key Features

- AC & DC Voltage tests up to 690V
- Clear Oversize luminous LED indication
- Soft to touch overmoulded rubber body
- Continuity Test
- Self diagnostic test
- Single Pole phase test
- Phase Rotation test
- Polarity indication
- Auto power on/off
- IP65 rating protects against Dust & Water ingress
- Designed to the new international safety standards IEC 61243-3 & IEC 61010-1
- Cat IV 600V

**Included:** Built in test leads, Batteries  
Instruction manual with Certificate of Conformity

**Weights & Dimensions:** Boxed Weight: 242g  
Boxed Dimensions: 300(H)mm x 40(H)mm x 70(D)mm




5551215

## 5551215 Proving Unit

50-690 V proving unit with just two terminals to test AC and DC voltage detectors. Fast response and works with low impedance voltage testers. Ramps down through voltage levels. LED indication of functioning unit.

**To ensure the safety of personnel working on electrical circuits BEST PRACTICE for the use of a proving unit before working on dead circuits.**

Output voltage: 180V in to 6.8  $\Omega$  , 720V - 820V in to 10M  $\Omega$   
Operating conditions: -10 to 40 C, 70% RH  
Dimensions: W65 x H120 x D45mm

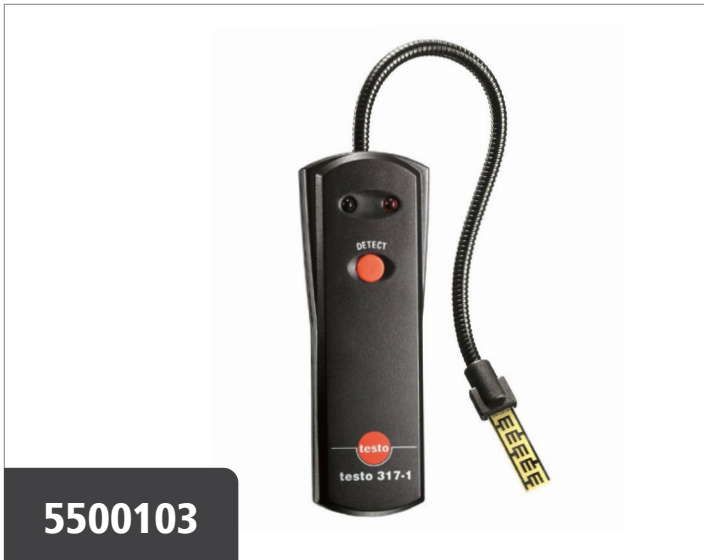

5500103

### 5500103

#### testo 317-1 - Gas spillage detector

Gas leaks on heating systems can quickly become a problem, because breathing in poisonous gases leads to health risks or even a risk of death. With the testo 317-1 back pressure indicator you have a handy measuring instrument which detects escaping heating flue gases quickly and reliably.

testo 317-1 - Gas Leak Detector with flexible probe and battery

- Weight 300 g
- Dimensions (128 x 46 x 18 mm)
- Measuring medium
- Battery type - 3 AAA micro batteries
- Length probe shaft -200 mm
- Length probe shaft tip- 35 mm
- Diameter probe shaft tip -10 mm
- Reaction time 2s



5550101

### 5550101

#### Non-contact Voltage & Magnetic Indicator

Detects the presence and polarity of magnetic fields produced by indicators, relays, solenoids and transformers. The integral self-test activates the sensor in the tip of the tester at 50Hz as well as checking the battery and LED. This proves that the unit is fully functional and avoids the need for a separate proving unit.

Operating Temperature: 0°C to 50°C

Overvoltage: CAT III 1000V, CAT IV 600V

Supply: 9V battery alkaline battery, MN1604 / PP3 or equivalent

Housing: Flame retardant ABS

Dimensions: 202 x 32 x 22mm

Voltage Range

- 100 to 600V AC

Frequency Range

- 50Hz to 50kHz

Sensitivity

- 3mm for 100V, 50Hz
- 23mm for 240V, 50Hz

Distances are from the tip of the unit to a flat PVC twin core and earth cable suspended in free space.

Indication

- Visual: Red LED
- Audible: 2kHz Tone

Magnetic Field Range

- +/- 10mT, 0 - 50kHz

Magnetic Pole

- North Pole: Red LED
- South Pole: Green LED



5500106

**5500106**  
**Differential Pressure Meter**

Differential pressure measurement on gas hot water heaters or on filters of air conditioning systems, and also flow measurements in ventilation ducts using a Pitot tube: the compact differential pressure measuring instrument, which comes with a silicone connection hose and other useful accessories, can help you maintain and install systems in the sanitary and HVAC sector. Differential pressure measurement from 0 to 100 hPa. Flow measurement possible with a Pitot tube (available as an option). Magnets on the rear allow hands-free work. 10 units to choose from, display in pascals can be selected. Includes protection cap, belt holder, 2 x connection hoses, wrist strap, calibration protocol.



5500116

**5500116**  
**Contact Vane Anemometer**

This vane anemometer measures air velocity and air temperature. Use it to carry out quick spot measurements at ventilation grilles (air outlets). The anemometer is also ideal for use outdoors. It displays the units m/s, km/h, fpm, mph and kts, and also calculates wind chill and the Beaufort wind force. Vane anemometer with permanently installed 40 mm vane. Practical: with single-point averaging, max/min and Hold function.

Includes protective cap, wrist strap, calibration protocol and batteries.



5551449

**5551449**  
**Therma Waterproof Thermometer & K Type Waterproof Surface Probe**

**Therma Waterproof Thermometer**


Therma waterproof thermometer with thermocouple probe socket. The Therma Waterproof thermometer is housed in a robust waterproof black ABS case which offers IP66/67 protection. The thermometer utilises state of the art electronic circuitry, designed for reliability and ease of use and can be submerged or washed under a running tap - ideal for industrial applications.

The Therma Waterproof thermometer measures temperature over the range of -99.9 to 299.9 °C with a 0.1 °C resolution, auto-ranging to 1 °C resolution over the range of 300 to 1372 °C. The Therma Waterproof features a large easy to read, LCD display with max/min, hold, open circuit, low battery indication and an optional backlight. The unit also incorporates an auto-power off facility that automatically turns the instrument off after ten minutes, maximising battery life.

Each thermometer is housed in a durable, ABS case that incorporates an integrated rubber seal to ensure complete water tightness and help reduce the possibility of damage in harsh environments.

Meets the European Standard EN 13485

**Temperature Probe:** 8 x 130mm    **Sensor Type:** Thermocouple

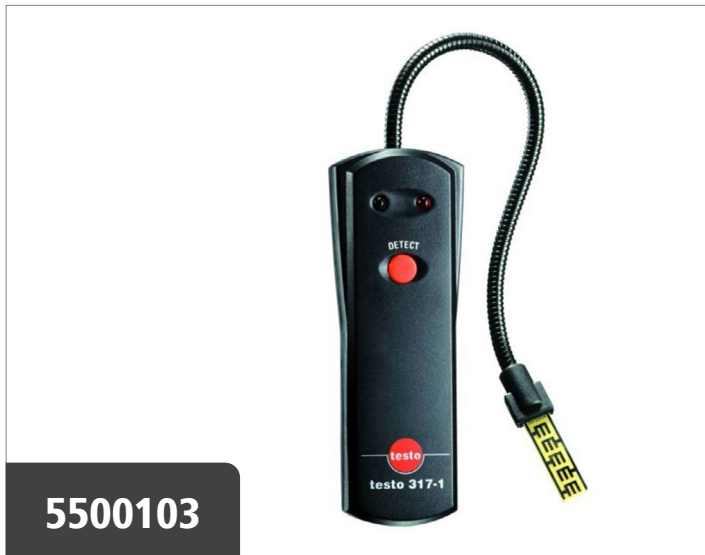

### 5500103

#### Gas Spillage Detector

Gas leaks on heating systems can quickly become a problem, because breathing in poisonous gases leads to health risks or even a risk of death. The detectors' back pressure indicator quickly and reliably detects escaping heating flue gases.

The handy instrument immediately gives an optical and acoustic alarm when gas is escaping. This means no visual contact with the measuring instrument is needed. The flexible probe even enables use in the tightest spaces or in inaccessible areas.



### 5501342

#### Testo 316-1 - gas leak detector with flexible probe

The testo 316-1 gas leak detector: Identifying and locating leaks or even reading off concentration values in ppm or %LEL (lower explosive limits) are all exceptionally easy. No training required thanks to the intuitive traffic-light scale on the head and the display illumination.

Testo 316-1 gas leak detector makes it particularly easy to identify and locate leaks. The multicolor LED on the sensor head as well as the flexible probe for hard-to-reach places, support you intuitively and precisely in leak detection.

#### Key benefits:

1. Multi-colour LED (visual and acoustic alarm)
2. Sensor self-test and automatic zeroing
3. Flexible probe for locations that are difficult to access
4. Display with intuitive traffic light backlighting
5. Battery-powered



### 4350115

#### Clip Personal Carbon Monoxide (CO) Detector

5500103



5109896

### 5109896

**D20 20V Brushless Combi Drill, 1 x 4.0Ah Battery, 1 x Fast Charger** Brushless motor, 23 torque settings, Metal keyless chuck, Variable speed with electronic brake, LED Worklight, Adjustable side handle and depth rod, Supplied with 4.0Ah battery and charger. D20 interchangeable battery system allows you to combine the same battery/batteries with any of the tools within the D20 series.

**Contents:**

- 1 x D20 20V Brushless Combi Drill
- 1 x 4.0Ah Battery
- 1 x Fast Charger

- D20 interchangeable battery system allows you to combine the same battery/batteries with any of the tools within the D20 series
- Built with brushless technology for efficient runtime
- Supplied with 1 x 4.0Ah battery
- D20 fast battery charger
- Designed with a 2 speed gearbox
- LED worklight
- Metal keyless chuck
- Adjustable side handle and depth rod
- 23 Torque settings



5109896

### 5109896

#### D20 20V Li-ion Battery, 4.0Ah

Features: 20V 4.0Ah, Lithium-Ion, Charge indicators lights. D20 interchangeable battery system allows you to combine one battery with any of the tools within the D20 series

- 20V 4.0Ah
- Lithium-Ion, Charge indicator lights
- D20 interchangeable battery system allows you to combine one battery with any of the tools within the D20 series

**Content:**

- 1 x D20 20V Li-ion 4.0Ah Battery



5109896

### 5109896

#### Heavy-Duty Medium Tool Bag

Manufactured from water repellent polyester with PVC backing, fitted a nylon zip with framed opening. Attached with 13 internal pockets. Packed in polythene bag with display card.





5101346

**5101346**  
**GMS 120 Professional**

The preferred multi-detector in its class

Most objects are found and application errors are avoided due to the automatic calibration. Detection of even deep-lying objects - up to a depth of 12 cm. Even more reliable detection of objects due to three-colour LED luminous ring.

Detectable Materials: Ferrous metals, non-ferrous metals, wooden studs, live cables

Max. detection depth: 120 mm

Detection depth, steel, max.: 120 mm

Detection depth, copper, max.: 80 mm

Detection depth of live cables, max.: 50 mm

Detection depth of wooden substructures, max.: 38 mm

Automatic deactivation, approx: 5 minutes

Display of max. drilling depth: False

Dust and splash protection: IP 54

Power supply: 1 x 9 V 6LR61



5501234

**5501234**  
**300 Longlife kit with printer - 300 Longlife flue gas analyser (O2, CO H2-compensated up to 30,000 ppm, NO)**

The flue gas analyser with Longlife sensors is ideal for heating engineers who carry out installation and maintenance work on heating systems several times a day. It combines decades of experience in measuring technology with contemporary Smart-Touch operation, robust construction and e-mailing of reports. The testo 300 enables easy measurement of flue gas, draught, pressure, ambient CO and differential temperature. This kit includes a factory fitted NO sensor for NOx measurement.

High-quality sensor technology with up to 6 years' service life.

Delivery Scope:

- Longlife flue gas analyzer with O2 and CO H2-compensated sensor up to 30,000 ppm
- USB mains unit, including cable
- Modular flue gas probe, 180 mm; Ø 8 mm; Tmax 500°C; TÜV-tested; 2.2 m hose
- Spare dirt filters for modular flue gas probe; 10 off
- BLUETOOTH®/IRDA printer, including 1 roll of thermal paper and rechargeable battery
- Spare thermal paper for printer, indelible ink
- EasyHeat PC software
- Instrument case (height: 130 mm) for instrument, probes and accessories



5010124

### 5010124

#### Continuity Bond with Crocodile Clips (120cms)

Earthing is an important part of pipe installation, especially copper pipe where a static charge can build up very quickly and cause a spark if touched or discharged in some other way. It is a requirement of the Gas Safety Regulations that earthing and earth continuity must remain present on the whole gas pipeline if a gas meter, section of pipe or fitting is removed, creating a space in the pipeline.

These Continuity Bond with Crocodile Clips are a good quality, easy to use and fast way to maintain the continuity of a pipeline up to 1" or 28mm diameter. The cable used with this product is Tri rated BS6231 type CK.

- 10mm multi strand, tri rated to 600volts earth cable. BS6231 type CK.
- Fits up to 1" pipe.

Diameter (up to): 28MM    Diameter: MM    Diameter (from): 0MM  
 Product height: 8.5CM    Product length: 29.5CM    Product width: 16CM

### 5551233

#### Kewstick DUO (Non-Contact Voltage Detector)

##### ITEM USED FOR INDICATION ONLY

Unique dual sensitive non-contact voltage detector - just press and hold the desensitising button and you can differentiate between live and earthed cables approximately 10mm apart.

##### Key Benefits:

- Dual sensitivity
- Heartbeat - green LED indicates that the unit is on and working correctly
- Red LED indicates presence of voltage
- Audible tone also indicates the presence of voltage

##### Key Features:

- Clearly detects 90 - 600 volts AC without metal contact
- Two colour LEDs - Green for correct working and Red for Voltage detection
- Two tone buzzer, one for correct working and one for voltage detection
- Pocket-size for handy use anywhere
- Low power consumption circuits means long life batteries
- Cat IV rated
- 2 year unconditional guarantee (excluding batteries)

### 5551617

#### Non Contact Proving Unit

Portable proving unit for use on / off site that instantly proves the function of non-contact voltage testers before and after use.

Simple to use, just press the button and tests.

Belt clip for hands-free use.

Visual LED indication of function.

Robust and drop-proof from 1 metre.

Comes installed with a 9V battery.



5551233 & 5551617



5150004

### 5150004

#### Super Fire 2 Torch

The UK's No.1 Best Selling Torch. With its fully adjustable flame control as well as the constant flame mode and Guaranteed 360° Anti Flare, it is ideally suited for many different uses. Ideal for soft soldering and brazing. With the 1" thread connection is suitable for use with MAP/Pro™ and Propane. The SuperFire 2 can also be fitted with a Swirl Flame, or "Cool Tip" -with filter jet, for safer burning and a finer flame. The SuperFire 2™ is servicable and replacement parts are available for long service life.\*Always remove the torch from the bottle and purge with gas between uses and for storage.

Dangerous goods indicator: Material is not a hazardous good

Product height: 4CM Product length: 30CM Product width: 11.5CM




5903204

### 5903204

#### 185mm Ergo Plus® Fully Insulated VDE Pliers

Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic shape of head and handles allow user to access difficult working areas and still keep a tight grip on the workpiece. The pliers have following functions: flat cutter on the tip of the head for use on cable ties; wire stripper 1.5 and 2.5mm<sup>2</sup> wire; diagonal cutter for medium hard wire (3.5mm<sup>2</sup>), hard wire (2.5mm<sup>2</sup>) and piano wire (2mm<sup>2</sup>); crimpers for terminals 1.5 and 2.5mm<sup>2</sup>; pattress screw cutter for M3.5 and M4 screws and wire looping device on underside of pliers for looping wire for plug screws/terminals. Display packed.

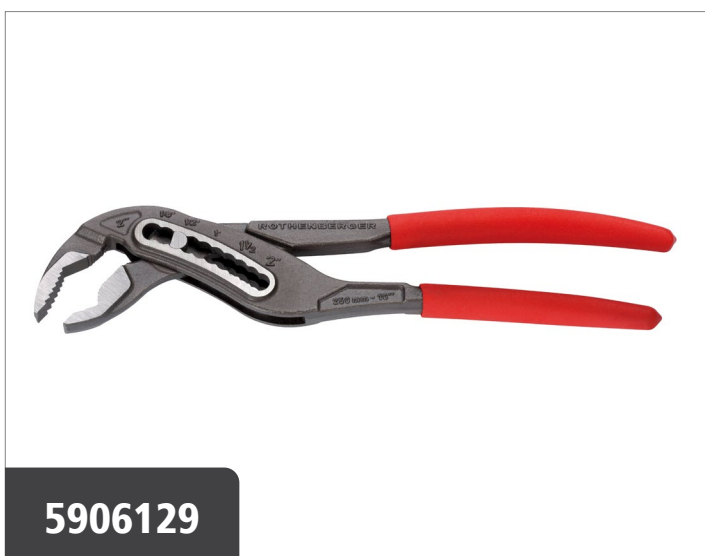

5906129

### 5906129

#### ROGRIP M 10"

Quickly adjustable water pump plier for clamping and rotating pipes of different materials up to Ø 2". Self-locking; 3-point support on the tube (important for clamping sleek tubes). Wide handles: For greater comfort and better power transfer. Easy to transport in a sturdy plastic rolling case. Non-slip plastic handles: High grip even when working with water and oil. Curve shape design: Reduces the risk of fingers getting clamped.

Diameter working range (up to):	2ZOLL
Length in cm:	25,20CM
Width in cm:	6,00CM
Height in cm:	1,80CM

Diameter working range (up to):	60MM
Diameter working range (from):	0MM



### 5150123

#### Rapid Pipe Repair Clamp (22mm)

The Kibosh Rapid Repair clamp is a simple to use repair clamp for accidentally perforated domestic water pipes, leaky fittings, and central heating pipes

- Can be fitted when the leak is still in full flow
- Suitable for metal, plastic and multilayer pipe
- Can be fitted in tight spaces to clipped pipes and in the notch of a joist
- Once fitted the pipe can continue to function normally-hot or cold!
- Can accommodate some fittings
- Can withstand 10 Bar/150 PSI
- Made from NON TOXIC materials
- Reusable

The Kibosh Rapid Repair clamp comes in 15 mm, 16 mm/USA/CAN 1/2", and 22 mm/USA/CAN 3/4"



### 5150010

#### High Temperature Super Mat

The Super-Mat, High Temperature Soldering Mat gives maximum protection when carrying out soldering and other similar hot works. It gives protection up to 1260°C and also has a wipe clean silicone backing feature to ensure the cleanliness of the product for best results.

This new improved version has increased heat protection with the Gold Vermiculite coating with Ecomab™ body soluble Class "0" Infiland and increased strength and integrity with the wire reinforced kevlar thread binding. The Plumbers Super-Mat can be used in tight spaces, corners and around pipework because of its flexible construction. This mat is also completely asbestos free.

Product height: 2CM  
 Product length: 23CM  
 Product width: 20CM





5012174

**5012174**  
Tape - Gas Identification (38mm x 33m)



5012189

**5012189**  
Pack of 5 rolls of Gas PTFE Tape




5010126

**5010126**  
Standard Smoke Pellets (Tub 50 / 13g)



5010129

**5010129**  
Encapsulated Smoke Pellets (Tub 10 / 5g)

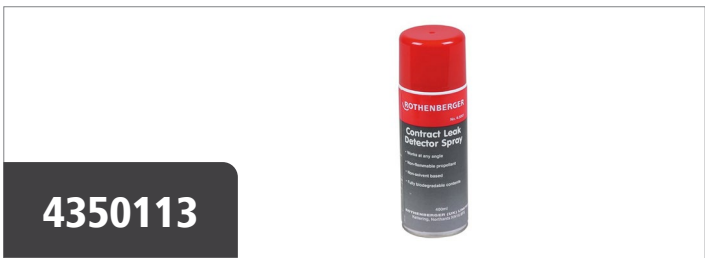

4350113

**4350113**  
Contract Leak Detector Spray (400ml)




5906128

**5906128**  
14" Aluminium Offset Wrench  
One-handed corner wrench, 90°, 14"



5011756

**5011756**  
Aluminium Pipe Wrench 10"  
One-handed pipe wrench. Features similar to HEAVY DUTY. Weight savings of approx. 40%: extremely light, high strength aluminium alloy. Wearing parts replaceable: hook and heel jaw can be purchased separately.

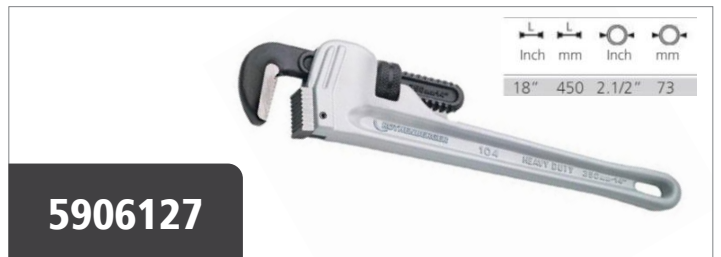

5906127

**5906127**  
18" Aluminium Pipe Wrench  
One-handed pipe wrench. Features similar to HEAVY DUTY. Weight savings of approx. 40%: extremely light, high strength aluminium alloy. Wearing parts replaceable: hook and heel jaw can be purchased separately.