



# HVAC TOOLKIT



5902373

**5902373**

**Hi-Torq® Metric Combination Spanner Set (12 Piece)**  
Generally in accordance with DIN3113 Specifications

Expert Quality, with Draper Expert HI-TORQ® deep offset pattern ring end. Open end set at 15°. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Supplied on wall mountable plastic rack. Display packed.

Contents: 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 19 and 22mm




5902361

**5902361**

**Imperial Combination Spanner Set (11 Piece)**  
Generally in accordance with DIN3113 Specifications

Expert Quality, forged from chrome vanadium steel hardened, tempered and chrome plated for corrosion protection. Draper HI-TORQ® ring end offset at 15°. Jaw offset at 15°. Supplied in Tetron divided wallet with tie cord. Display packed.

Contents:  
1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4, 13/16 and 7/8" AF

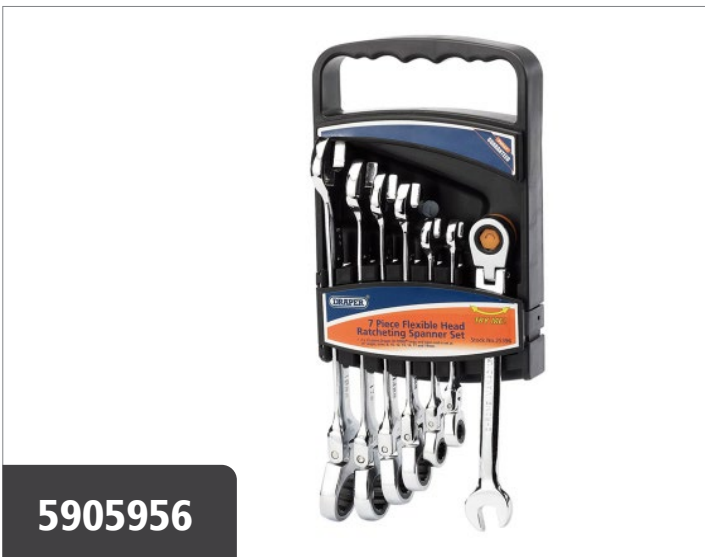

5905956

**5905956**

**Draper Hi Torq® Metric Flexible Head Ratcheting Combination Spanner Set (7 Piece)**

Open end set at 15°. The Draper HI-TORQ® flexible head allows movement through 180°. Only 5° movement required to turn fastener, especially useful in confined spaces. Forged from chrome vanadium steel, hardened, tempered, chrome plated and fully polished throughout. Display packed.

Contents: 8, 10, 12, 13, 14, 17 and 19mm



5916923

### 5916918

#### 3/8" Sq. Dr. Combined MM/AF Socket Set In Metal Case (40 Piece)

**Manufactured and tested generally in accordance with DIN3122 and ISO3315 Specifications**

Expert Quality, six point sockets made from chrome vanadium steel that's hardened and tempered with a micro satin finish. Supplied with a 72 tooth reversible soft grip ratchet and accessories. Each socket has a knurled ring for extra grip. Packed in a steel carrying case with EVA foam insert.

Contents:

- 17 metric sockets size 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22mm; 11 imperial sockets size 1/4, 5/16, 3/8, 7/16, 1/2, 9/16, 5/8, 11/16, 3/4", 13/16, 7/8"
- 3 spark plug sockets size 10, 12, 14mm
- 72 tooth reversible ratchet with soft grip handle and quick release button
- 3 wobble extension bars size 75, 150 and 250mm
- \*T' bar head converters 1/2" (F) x 3/8" (M)
- 3 adaptors 3/8" (F) x 1/4" (M), 3/8" (F) x 1/2" (M), 1/2" (F) x 3/8" (M)
- Universal joint. \*T' bar head/converter when used with wobble extension bar forms a sliding 'T' bar.



5900506

### 5900506

#### Ball End Metric Hexagon Key Set (8 Piece)

Manufactured from chrome vanadium steel that's hardened and tempered. The ball end tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Fitted in pocket-size plastic storage holder with non-slip grip. Display packed.

Contents: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0 and 8.0mm.



5902390

### 5902390

#### Imperial Hexagon and Ball End Hexagon Key Set (12 Piece)

Hexagon keys with ball end on the long arm and conventional ends on short arm. The ball type hexagon tip allows the hexagon key to be used up to 30° angle from the screwhead recess. Manufactured from chrome vanadium steel that's hardened and tempered then applied with a chemically blacked finish. Supplied in fold-out easy release holder which can be wall-mounted. Contents: 1/16, 5/64, 7/64, 9/64, 5/32, 1/8, 5/32, 3/16, 7/32, 1/4, 5/16 and 3/8".



**5900040**

**5900040**

**Heavy Duty Soft Grip Hacksaw (300mm)**

Expert Quality, steel frame with aluminium handles. Frame has two sets of blade spigots which allows straight or 45° cutting. Supplied with a 300mm bi-metal blade.



**6800139**

**6800139**

**10 x 300mm 24TPI B-Metal Hacksaw Blades**

**Conforms to BS 1919**

Expert Quality, saw edge, manufactured from high speed steel strip, electron beam welded to high quality carbon steel backing. Display packed ten blades per card.

Pitch: 24



**5902372**

**5902372**

**250mm Adjustable Pipe Wrench**

Expert Quality, traditional pattern wrench. Handle drop forged hardened and tempered. Jaws additionally induction hardened to 55-60 HRC for durability and long life. Frame and handle electrostatically painted. Display packed.

Capacity: 40mm Length: 250mm



**5902379**

**5902379**

**600mm Adjustable Pipe Wrench**

Traditional pattern wrench. Handle drop forged hardened and tempered. Jaws additionally induction hardened to 55-60 HRC for durability and long life. Frame and handle electrostatically painted. Display packed.

Capacity: 75mm. Length: 600mm




**5902380**

**5902380**

**450mm Adjustable Pipe Wrench**

Traditional pattern wrench. Handle drop forged hardened and tempered. Jaws additionally induction hardened to 55-60 HRC for durability and long life. Frame and handle electrostatically painted. Display packed.

Capacity: 65mm  
Length: 450mm

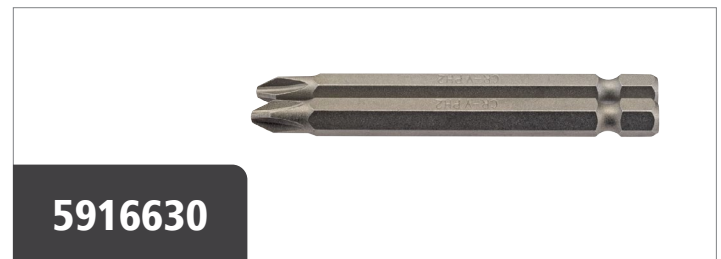

**5916630**

**5916630**

**No. 2 1/4" Hex. Cross Slot Insert Bit 75mm Long x 2**

Chrome vanadium steel hardened, tempered with a shot blasted finish. Supplied in 1, 2, 5 or 10's. Display packed.

Length: 75mm  
Quantity: 2  
Size: No. 2



5921001

### 5921001

#### Ergo Plus® Slimline VDE Approved Fully Insulated Screwdrivers (6 Piece)

Manufactured and individually certified to EN 60900

Expert Quality, with an insulated sheath the same diameter as the blade, enabling the tip access to deep seated screws found in terminals and switch boards. Tested to 10kV, suitable for working on live circuits of 1kV AC and 1.5kV DC. SCVM steel blades hardened, tempered and chemically blackened. Display packed.

PZ TYPE products are compatible with \*Pozidriv®/Supadriv® fixing systems. \*Pozidriv®/Supadriv® are registered trademarks of Trifast Plc.

Contents: 3 plain slot sizes: 3.5 x 100, 4.0 x 100, 5.5 x 125mm  
1 cross slot sizes: No.2 x 100mm  
2 PZ TYPE: No1 x 80mm and No. 2 x 100mm




5903204

### 5903204

#### 185mm Ergo Plus® Fully Insulated VDE Pliers Manufactured to DIN Standard and individually certified to EN 60900

Expert Quality, special steel hardened and tempered with cutting edges separately induction hardened. Ergonomic shape of head and handles allow user to access difficult working areas and still keep a tight grip on the workpiece. The pliers have following functions: flat cutter on the tip of the head for use on cable ties; wire stripper 1.5 and 2.5mm<sup>2</sup> wire; diagonal cutter for medium hard wire (3.5mm<sup>2</sup>), hard wire (2.5mm<sup>2</sup>) and piano wire (2mm<sup>2</sup>); crimper for terminals 1.5 and 2.5mm<sup>2</sup>; pattern screw cutter for M3.5 and M4 screws and wire looping device on underside of pliers for looping wire for plug screws/terminals. Display packed.

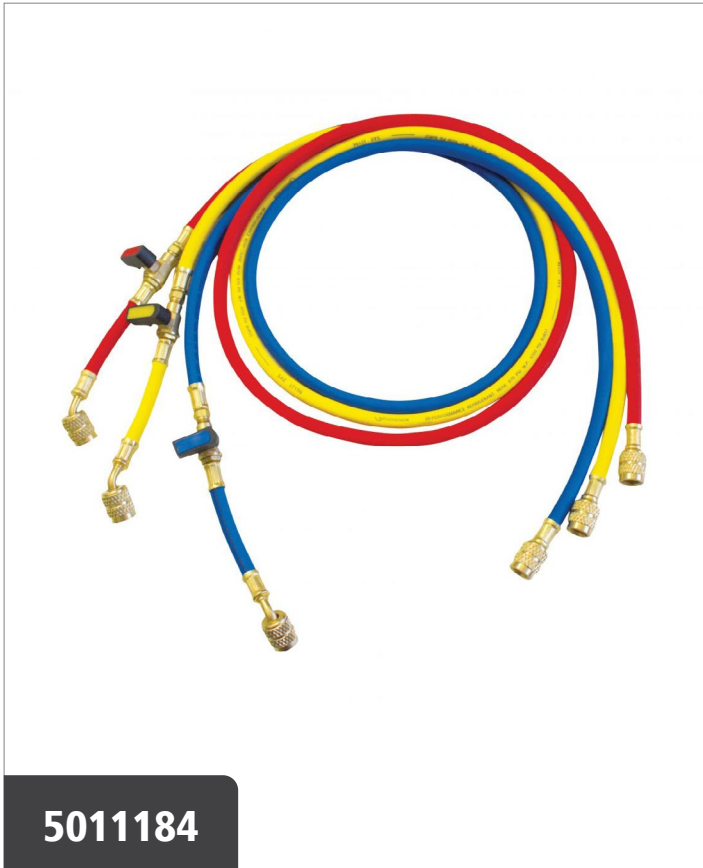

### 5011184

#### Set of 3 pressure hoses 1,5m, 1/4" SAE

3 refrigerant pressure hoses with shut-off valve for use in refrigeration and air conditioning systems and heat pumps.

The ROTHENBERGER pressure hoses PLUS sets serve the installation, maintenance, and disposal of refrigeration and air conditioning systems and heat pumps. The integrated ball valve reduces refrigerant loss. As a result, and due to the pressure resistance up to 60 bar, they are ideally suited for all refrigeration plant engineers, technicians and installers.

- No confusion and safe work through color coding (blue, red, yellow)
- Teflon seal with up to 10 times longer service life compared to neoprene seals
- Working pressure 60 bar / burst pressure 300 bar
- Suitable for refrigerants R744 and R32 (sub-critical)




### 5010118

#### Pressure hose set Plus, 5/16" SAE, 1,5m

3 refrigerant pressure hoses with shut-off valve for use in refrigeration and air conditioning systems and heat pumps.

The ROTHENBERGER pressure hoses PLUS sets serve the installation, maintenance, and disposal of refrigeration and air conditioning systems and heat pumps. The integrated ball valve reduces refrigerant loss. As a result, and due to the pressure resistance up to 60 bar, they are ideally suited for all refrigeration plant engineers, technicians and installers.

- No confusion and safe work through color coding (blue, red, yellow)
- Teflon seal with up to 10 times longer service life compared to neoprene seals
- Working pressure 60 bar / burst pressure 300 bar
- Suitable for refrigerants R32 and R744 (sub-critical)

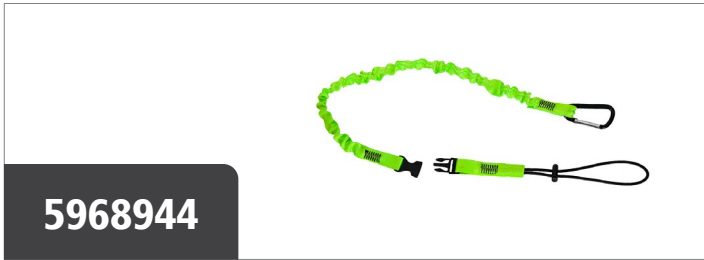

5968944

**5968944**  
**FP44 - Quick Connect Tool Lanyard**

A versatile tool lanyard which prevents falling objects from a height. Specifically designed to be interchangeable with FP45, suitable for quick and easy exchanges of multiple tools. One size.

- Allows quick and easy attachment/detachment of tools
- Prevents dropped and falling objects
- Ultra lightweight for long uses, Ergonomic and versatile



5552691

**5552691**

The KT1700 is your first level of protection against electrical shock when approaching metal enclosures / potentially live metal work. The identification of the live phase is more certain than using non-contact voltage indicators or similar devices.

- Indicates 50-600V AC
- Flashing red LED with audible tone when voltage is present
- Designed to work with PPE



5210893

**5210893**  
**Elite Focus LED Torch**

Focus High-Performance LED Torches are manufactured from anodised aluminium, these torches are lightweight, strong, durable and reliable.

Specifications:

Output: 100/30 lumens • Beam Distance: 50m  
 Run Time: 1.5/3 hours • Power: 2 x AAA alkaline batteries (supplied)  
 Size: 140 x 16/13.5mm • Weight: 31g exc. Batteries



52101569

**52101569**  
**Elite LED Multifunction Headlight 280 lumens**

The Lighthouse Elite LED Multifunction Headlight offers four output options; a high performance XPG LED for high and low spot beam output, and COB LED (Chip On Board) side lights for wide angle beam or red flashing functions.

Output: 100/280 lumens

Run Time: 3.5/7 hours Power: 3 x AAA batteries (supplied)



5010104

**5010104**  
**2 in 1 Soldering Iron and Gas Torch**

This free standing torch features instant electronic ignition, adjustable flame control, on/off gas switch, and a refillable tank. Soldering tip can also be used as a hot knife. One fill of standard butane lighter fuel will give up to 50 minutes (approx.) continuous work. Display packed.



5120111

**5120111**  
**Numatic (Henry Type) 230V Vacuum Cleaner**



5550101

### 5550101

#### Non-contact Voltage & Magnetic Indicator

Detects the presence and polarity of magnetic fields produced by indicators, relays, solenoids and transformers. The integral self-test activates the sensor in the tip of the tester at 50Hz as well as checking the battery and LED. This proves that the unit is fully functional and avoids the need for a separate proving unit.

Operating Temperature: 0°C to 50°C

Overvoltage: CAT III 1000V, CAT IV 600V

Supply: 9V battery alkaline battery, MN1604 / PP3 or equivalent

Housing: Flame retardant ABS

Dimensions: 202 x 32 x 22mm

Voltage Range

- 100 to 600V AC

Frequency Range

- 50Hz to 50kHz
- Sensitivity
- 3mm for 100V, 50Hz
- 23mm for 240V, 50Hz

Distances are from the tip of the unit to a flat PVC twin core and earth cable suspended in free space.

- Indication
- Visual: Red LED
- Audible: 2kHz Tone
- Magnetic Field Range
  - +/- 10mT, 0 - 50kHz Magnetic Pole
  - North Pole: Red LED
  - South Pole: Green LED



5551284

### 5551284

#### 1000A Ultra Slim Clamp Meter

Ultra slim and lightweight 1000A clamp with 0.01A resolution

##### Key Benefits

Slim, lightweight high capacity clamp meter from the world leaders in clamps.

DMM functionality

G7 test leads

##### Key Features

10mm Jaw thickness

Tear drop jaw shape for easy access in to distribution boards

1000A Current measurement

0.01 A resolution

AC Voltage measurement up to 600V

1mV Resolution AC V

DC Voltage measurement up to 600V

0.1mV Resolution DCV

Resistance measurement

Continuity buzzer

Fuseless electronic protection on up continuity up to 600V

Comes with popular G7 test leads

Includes carry case with belt loop

##### Included:

- Test leads
- Carry pouch with belt loop
- Batteries
- Manual





5501335

## 5501335

### Testo 557s Smart Vacuum Kit - Smart digital manifold with wireless vacuum and clamp temperature probes

#### Product Description:

Start your wireless measurements on refrigeration and air conditioning systems and heat pumps straight away. Thanks to the Bluetooth vacuum probe supplied, you can even measure vacuum without any cables or hoses. You will get the testo 557s smart digital manifold with Bluetooth and 4-way valve block, one testo 552i wireless vacuum probe (Bluetooth), two testo 115i wireless clamp thermometers (Bluetooth, NTC) and a robust transport case. For other wireless measurements, other optionally available testo Smart Probes are also ideal.

- Completely wireless measurements and all results at a glance: thanks to Bluetooth probes and large graphic display
- Exceptionally compact and reliable thanks to the easy-to-handle, robust housing with IP 54 protection class
- Easy, wireless, flexible measurements and documentation: Temperature and vacuum measurements via automatic Bluetooth®
- In the kit: testo 557s smart digital manifold with Bluetooth and 4-way valve block, 1 x testo 552i wireless vacuum probe (Bluetooth), 2 x testo 115i wireless clamp temperature probes (Bluetooth, NTC), case
- Testo 557s Digital Manifold
- Calibration Protocol
- Testo 552i Wireless Bluetooth Vacuum Probe
- 2x Testo 115i Wireless Bluetooth Clamp Thermometer
- Case

#### General Technical Data

Dimensions 229 x 112.5 x 71 mm (LxWxH)

Storage temperature -20 to +60 °C

Operating temperature -20 to +50 °C

Refrigerants update via App R11; FX80; I12A; R1150; R1270; R13B1; R14; R142B; R152A; R161; R170; R227; R236fa; R245fa; R401C; R406A; R407B; R407D; R41; R411A; R412A; R413A; R417A; R417B; R417C; R422A; R426A; R508A; R508B; R600; RIS89; SP22



5012298

## 5012298 Electronic Leakage Detector for Refrigerants

Testo 316-3, leakage detector for CFC, HFC, HCFC incl. sensor head, transport case, calibration protocol, batteries and filter.

Testo 316-3 is a reliable leakage detector for refrigerants which should be a part of every professional's refrigeration technology equipment. It detects even the smallest leaks thanks to its high level of sensitivity of 4 g/a, and fulfils the requirements of the F-gas regulation as well as the standards SAE J1627 and EN14624:2012. The instrument is ready for use immediately after switching on, without the need for selecting a characteristic curve. Thanks to the automatic zeroing, the testo 316-3 detects leaks even in rooms which have already been contaminated.

- High sensitivity < 4 g/a allows the detection of the smallest leaks
- Detects all common refrigerants
- Easiest possible operation thanks to a single button
- Immediate readiness with no pre-settings
- LED indicator of leakage with simultaneous audible alarm

### Techn. data sensor

Meas. parameter: g/a      Sensitivity: 4 g/a (0.15 oz/a)

### General Technical Data

Detectable refrigerants: R-22, R134a, R-404A, R-410A, R-507, R438A and all CFCs, HFCs, and HCFCs

Conformities: SAE J1627, EN 14624:2012, EG 2004/108/EG

Operating temperature: -18 to +50 °C

Oper. humidity: 20 to 80 %RH


Storage temperature: 0 to +50 °C

Battery type: 2 x D

Battery life: 16h permanent operation

Sensor lifetime: Approx. 80 to 100 h (corresponds to approx. 1 year)

Weight: Approx. 500 g (incl. batteries)



5551433

### 5551433

#### Velcro Pipe Temperature Probe

Velcro pipe temperature probe. This 500mm wrap-around velcro pipe probe is suitable for medium and large pipe temperature measurement in the HVAC industry. Accuracy to BS EN 60584-1:2013

Response time: less than 30 seconds  
 Probe temperature range: -10 to 100 °C  
 Probe dimension: 20 x 500 mm



5551430

### 5551430

#### Waterproof Surface Probe (Coiled Lead)

Ø8 x 130mm. Fast, accurate response  
 Accuracy to BS EN 60584-1:2013  
 Probe response time: less than 0.5 of a second  
 Temperature range: -75 to 250°C  
 Probe diameter: 8mm  
 Probe length: 130mm

### 5551233

#### Kewstick DUO (Non-Contact Voltage Detector) ITEM USED FOR INDICATION ONLY

Unique dual sensitive non-contact voltage detector - just press and hold the desensitising button and you can differentiate between live and earthed cables approximately 10mm apart.

##### Key Benefits:

- Dual sensitivity
- Heartbeat - green LED indicates that the unit is on and working correctly
- Red LED indicates presence of voltage
- Audible tone also indicates the presence of voltage

##### Key Features:

- Clearly detects 90 - 600 volts AC without metal contact
- Two colour LEDs - Green for correct working and Red for Voltage detection
- Two tone buzzer, one for correct working and one for voltage detection
- Pocket-size for handy use anywhere
- Low power consumption circuits means long life batteries
- Cat IV rated
- 2 year unconditional guarantee (excluding batteries)

### 5551617

#### Non Contact Proving Unit

Portable proving unit for use on / off site that instantly proves the function of non-contact voltage testers before and after use.

Simple to use, just press the button and tests.  
 Belt clip for hands-free use.  
 Visual LED indication of function.  
 Robust and drop-proof from 1 metre.  
 Comes installed with a 9V battery.



5551233 & 5551617



5551188

## 5551188 2 Pole LED Voltage Tester

### Key Benefits

Clear oversize luminous LEDs shine through voltage level  
Clear audible tone  
UK Specific GS38 Slender probe tips NO NEED to swap ends  
Bright torch light - gives ample illumination  
Fits into recessed terminals such as RCBOs without unscrewing any caps  
Phase Rotation - Bright green LEDs show left or right rotation.

### Indicates actual voltage if no batteries fitted

Two pole testers that use batteries should indicate a live circuit if the batteries die or have not been inserted into the tester.

This is normally indicated by a single LED but this does not indicate the actual voltage present.

The KT1780 & KT1790 have a separate circuit so they operate with no batteries or dead batteries and still indicate the actual voltage present.

### Key Features

AC & DC Voltage tests up to 690V  
Clear Oversize luminous LED indication  
Soft to touch overmoulded rubber body  
Continuity Test  
Self diagnostic test  
Single Pole phase test  
Phase Rotation test  
Polarity indication  
Auto power on/off  
IP65 rating protects against Dust & Water ingress  
Designed to the new international safety standards IEC 61243-3 & IEC 61010-1  
Cat IV 600V

**Included:** Built in test leads, Batteries  
Instruction manual with Certificate of Conformity

**Weights & Dimensions:** Boxed Weight: 242g  
Boxed Dimensions: 300(H)mm x 40(H)mm x 70(D)mm



5551215

## 5551215 Proving Unit

50-690 V proving unit with just two terminals to test AC and DC voltage detectors. Fast response and works with low impedance voltage testers. Ramps down through voltage levels. LED indication of functioning unit.

To ensure the safety of personnel working on electrical circuits **BEST PRACTICE** for the use of a proving unit before working on dead circuits.

Output voltage: 180V in to 6.8  $\Omega$  , 720V - 820V in to 10M  $\Omega$   
Operating conditions: -10 to 40 C, 70% RH  
Dimensions: W65 x H120 x D45mm



5101346

### 5101346

#### GMS 120 Professional

The preferred multi-detector in its class

Most objects are found and application errors are avoided due to the automatic calibration. Detection of even deep-lying objects - up to a depth of 12 cm. Even more reliable detection of objects due to three-colour LED luminous ring.

Detectable Materials: Ferrous metals, non-ferrous metals, wooden studs, live cables

Max. detection depth: 120 mm

Detection depth, steel, max.: 120 mm

Detection depth, copper, max.: 80 mm

Detection depth of live cables, max.: 50 mm

Detection depth of wooden substructures, max.: 38 mm

Automatic deactivation, approx: 5 minutes

Display of max. drilling depth: False

Dust and splash protection: IP 54

Power supply: 1 x 9 V 6LR61



5551434

### 5551434

#### Two Channel Thermocouple Thermometer

The thermometer allows the user to simultaneously use two type K thermocouple probes whilst displaying both current temperatures and the maximum and minimum recorded temperatures.

Measures temperature over the range of -99.9 to 299.9 °C with a 0.1 °C resolution or 300 to 1372 °C with a 1 °C resolution.

System accuracy:  $\pm 0.4^{\circ}\text{C} \pm 0.1\%$  of reading

Features a large, easy to read LCD display with °C/°F, T1, T2, max/min, open circuit, low battery indication, programmable high/low audible alarm and a user selectable backlight. In normal use, battery life is 3000 hours, however this is reduced when the sound and backlight are used.

The instrument is housed in an ergonomic, ABS case that includes 'Biomaster' additive which reduces bacterial growth. An integrated rubber seal ensures complete water resistance and helps reduce the possibility of damage in harsh environments.

Waterproof housing offers IP65 protection

Meets the European Standard EN 13485

Audible alarm with variable volume control.

Dimensions: 32 x 71 x 141mm.



<b>Voltage (up to)</b>	240V	<b>Voltage (from)</b>	220V
<b>Power input (up to)</b>	375W	<b>Final vacuum</b>	25MICRON
<b>Frequency (up to)</b>	60HZ	<b>Frequency (from)</b>	50HZ
<b>Pump delivery (up to)</b>	170LMIN	<b>Pump delivery (from)</b>	0LMIN

**5010115**

**5010115**  
**Refrigeration Vacuum Pump**  
**ROAIRVAC 6.0, 230V, 170 l/min, 375W**

2-stage vacuum pump for evacuation of refrigeration circuits. The Rothenberger ROAIRVAC 6.0 is suited for the evacuation of all refrigeration circuits according to DIN 8975. The two-stage rotary vane pump achieves a vacuum of less than 25 micron. This makes them ideal for all refrigeration plant engineers and technicians.

- Solenoid check valve to protect the refrigeration circuit from oil contamination in case of a power interruption.
- Vacuum gauge with integrated drag indicator allows quick and easy control of the evacuation process.
- Protection of the integrated components thanks to light and high-quality housing.
- Gas ballast valve for reducing the water vapour in the oil tank.
- Special filter reduces oil mist at the exhaust vent.
- Easy to read oil level through sight glass.
- Easily accessible oil drain plug for quick emptying.
- Thermal switch protects the unit from overheating of the motor.
- Standard 1/4" SAE connection, as well as 5/16" SAE and 3/8" SAE adaptor included.
- Detachable cable prevents cable damage.



**5011181**

**5011181**  
**ROREC PRO, 230V, 730W, 38,5bar**

The ROREC refrigerant evacuation devices are used for the evacuation of refrigerants from refrigeration and air conditioning systems as well as heat pumps. Thanks to its power, evacuating and emptying the device is easy.

- Maintenance-free operation through oil-free 2-piston compressor.
- 4-pole motor guarantees durability of the machine.
- Low noise and vibration emissions because of its compact design.
- Simple and safe work through intuitive operation.
- Emptying of refrigerant residue by using the PURGE function for working with different refrigerants.

Suction capacity gaseous	0,52KGMIN
Suction capacity liquid	3,7KGMIN
Suction capacity push/pull	9,95KGMIN
Voltage (from)	230V
Voltage (up to)	230V
Frequency (up to)	60HZ
Frequency (from)	50HZ



**6210114**

**6210114**  
**740mm Mobile Tool Chest**

Expert Quality, tool box on heavy duty wheels manufactured from tough durable plastic with integral telescopic transport handle. Supplied with tote tray and tool box lid with strap for holding a spirit level. Bar locking handle secures the lid which has a padlock eye for security. Graduated V groove in lid for cutting wood etc. Carton packed.

Contents - Configuration:

- tool box (external): 740 x 450 x 490mm
- tool box (internal): 680 x 380 x 380mm
- tote tray (internal): 560 x 365 x 110mm

Dimensions: 740 x 450 x 490mm



**5010110**

**5010110**  
**Javac Procharge 100 digital charging scales 100kg**

The Javac Procharge 100 digital charging scale is part of the brand's range of refrigerant servicing tools. With a compact weighing platform and tough case, transportation of this scale is easy and safe while a high resolution LCD display makes it simple to use.

Product Features:

- 5g resolution easy-read LCD display
- Weighing capacity of 100kg
- Durable hard plastic case for safe transportation and protection
- Memory function holds last reading until cleared
- Accuracy +/- 0.5%
- Units KGs/lbs
- Weight 2485kg
- 9V battery power supply
- 30 hours continuous use battery life
- Compact platform measures just 223 x 223mm

Dimensions (L x W x D) 250 (L) x 250 mm (W)



6200279

### 6200279

#### Technicians Tool Case

Expert Quality, manufactured from water repellent polyester with adjustable carrying handle and detachable shoulder strap. Multiple internal and external pockets for storing tools, equipment and computers etc. Packed in polythene bag with display card.

Dimensions: 470 x 150 x 300mm



6200241

### 6200241

#### 16 Pocket Tool Pouch

Expert Quality, nylon tool pouch, comprising 16 pouches of varying sizes, hammer loop, measuring tape clasp and chain. Supplied with 50mm wide adjustable webbing belt. Display carton.

IMAGE  
COMING  
SOON

6030085

### 6030085

#### A/C Mobile LOTO Kit